
aXis 2000 <u>A</u>nalysis of <u>X</u>-ray microscopy <u>I</u>mages and <u>S</u>pectra (08 May 2023)

aXis2000 - <u>A</u>nalysis of <u>X</u>-ray microscopy <u>I</u>mages and <u>S</u>pectra - is an <u>IDL widget</u> for viewing, comparing and processing X-ray microscopy images, spectra and spectromicroscopy

(combined image & spectra data). IDL stands for Interactive Data Language, a scientific computing platform developed by Research Systems Inc (RSI), currently owned by L3Harris. aXis2000 contains scripts developed by Chris Jacobsen, Carl Zimba, Adam Hitchcock and others. The widget platform was written by Adam & Peter Hitchcock. It is maintained and frequently updated by Adam Hitchcock. It can be obtained from <u>unicorn.mcmaster.ca/aXis2000</u>. It operates on Windows (WIN), Unix (X) and Macintosh (MAC) versions of IDL.

A compiled version (aXis2000.sav) for use with <u>IDL</u> <u>Virtual Machine</u> is available. This allows access to the power of aXis2000 without needing to purchase an IDL license. Please note that there are some features of

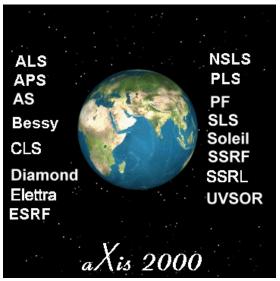

aXis2000 that work with the licensed version, but not with the VM version, and that the specific details of these problems depend on the versions of both IDL and aXis2000. I would appreciate it if you would notify me by email (aph@mcmaster.ca) about problems with the code or if you wish to make suggestions for improvements. If you make extensions or corrections to the distributed source files, or develop new IDL routines for specific data processing functionality, I would appreciate receiving a copy of your code revisions with sample data, so I can evaluate and incorporate in future versions.


I thank all the people who have written scripts that went into this, includng my son, **Peter Hitchcock** who helped set up the basic widget structure; **Carl Zimba** (Photons Unlimited) who supplied ZSTACK and extensively improved the overall package in 2000; **Eli Rotenberg, Jonathan Denlinger, Stefano Cerasari, Tolek Tyliszczak, Andy Smith, Andreas Scholl, Göran Johansson, Jacob Stewart Ornstein**, and many others. SPECIAL thanks to **Chris Jacobsen** (Stony Brook, nsls) for sharing his STACK_ANALYZE and PCA_GUI codes, **Rick Kneedler,** for providing the basis for the stack-fit routine, and **Billy Loo** for providing the SF X-ray spectral predictor based on, the Henke mass absorption coefficients, and the Conjugate Gradient Optimization routine (ax_cgo).

TO START *aXis2000*: *after installing aXis2000* (see end of this file) on Windows, Unix or Mac OS: Start IDL;

If you have set the <u>Preferences</u> (in IDL) so that **axis2000_batch.pro** is the start file, aXis2000 will launch automatically.

Otherwise, type **axis2000** on the IDL command line.

If you quit aXis2000 and stay in IDL, you can restart by typing axis2000

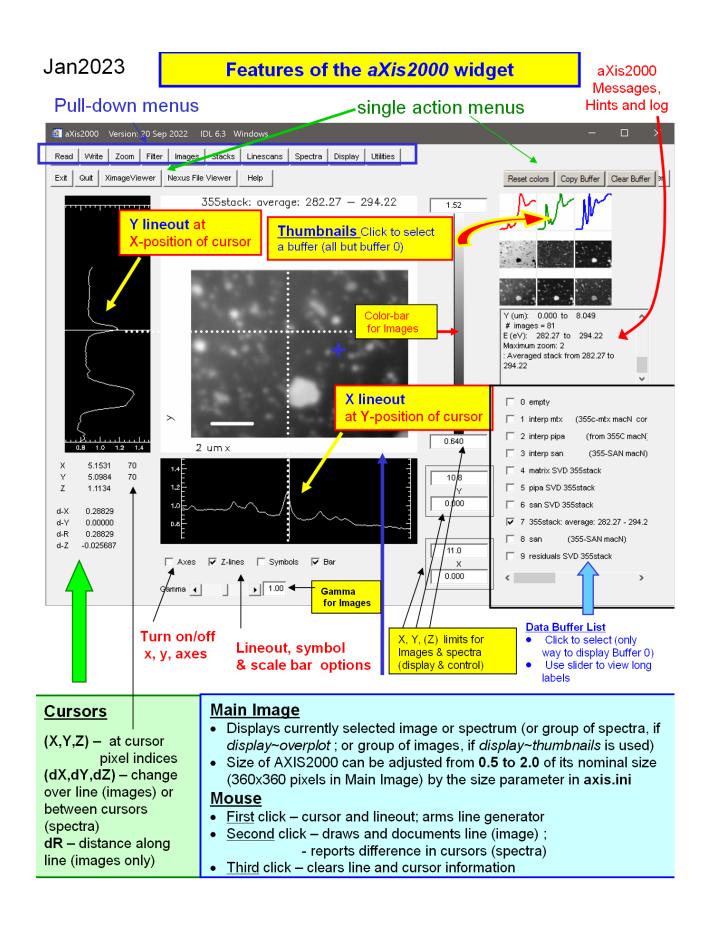

Notation conventions used in this reference manual for aXis2000

BOLD indicates a pull-down menu command <u>TOP LEVEL</u> items are bold, underlined, and light blue highlighted *Utilities~print~annotated* is a third level pull-down menu under Utilities first level button <u>Linescans</u> indicates an internal bookmark or a hyperlink to a webpage.

Hard copy: Printing the Main Image is achieved by using *Utilities~print*. aXis2000 prints via the IDL Printer virtual device.

Default parameters: The user can define a number of properties of the aXis2000 widget by editing the <u>axis initialization file</u> (axis_win.ini, axis_macos.ini or axis_unix.ini).

I find it convenient to document data analysis carried out with aXis2000 by taking snapshots of the display [**Snipping Tool** in Windows10 or **MWsnap** (freeware, <u>http://www.mirekw.com/</u>), and transferring via the clipboard to **Powerpoint, Keynote** or similar program.

In Windows 10 I use the free, open source program, paint.net, to modify snapshots from aXis2000.

TOP ROW PULL DOWN MENUS (Click on the menu name to go to that part of the manual)

Read Write Zoom Filter Images Stacks Linescans Spectra Display Utilities

READ for all types of data (<u>stacks</u>, images, linescans, spectra, ROIs etc)

STXM (sdf) - <u>self defining files</u> containing all types of data from files written by **STXM_Control** (the STXM acquisition program at ALS, Bessy-Maximus, CLS, Solaris and MaxIV STXMs) are read by the following <u>widget</u>. (single images; multi-region images, single spectra, multiple point spectra, linescans, image sequences for one region or multiple regions; DAQ, all types of motor scans, etc)

Read Self Defining Format files			\times
Path E:\aXis2000-docs\axis-documents\aX	is2000-manu	aN	
File A150109030	Browse	Paramete	ers
Type Image Scan Map	1 image	Cancel	ок
Channel PMT Region Region 1	xy correc	t? Ima	ge # 🔽
Give details 🔽 I-ring norm? I-ring r	norm value =	200.0	View I-ring

STXM_control output is described by a self-defining header file (*.hdr) which contains the information needed to identify the type of data contained in the associated data files. After selecting a file, the widget indicated above can be used to :

Browse – to select a file (you can also edit the file name– hit '**ENTER**' after changing) **Parameters** - list the header, which contains microscope, beamline & source parameters **Map** – generates a component map from the first 2 images of a stack [OD(2)-OD(1)]

To do this from any 2 images in a >2 image stack use *stacks~analyze~stack process* **1 image** – (only for stacks) read in one image from a stack (select using **Image#**) **Cancel** – dismiss the STXM (sdf) read in widget

OK - read the file, using the selected options

Channel - select data channel from pull down list, generated from header

Region - select spatial region (area or point) from pull down list, generated from header

xy correct ? - if checked, and the data was recorded, shifts position of each pixel to

that reported by the interferometer guidance system

Image# - select specific image of multi-image stack

Give details – plot I-ring values for a stack

I-ring norm? – if checked, all data intensities are adjusted as if Ring current is the value given in I-ring norm value

I-ring norm value - CLS - 200 mA (default); ALS - 500 mA

View I-ring – plot I-ring values for a stack

Selecting **OK** then reads the information in the associated image (*.xim) or spectral (*.xsp) ascii files into one or more aXis2000 buffers. Image sequences are converted directly to *.ncb files

READ (continued)

STXM (NeXus)

🐔 Read NeXus HDF5 files		\times
	Path Y:\aXis-Pass-Test-data\00-READ\02-STXM-NEXUS\Soleil\ File Sample_Image_2016-04-14_040 Browse Reset Type sample image 1 image Cancel OK Image Cancel OK Image OK Image Cancel OK Image Image Image Image Image Cancel OK Image Image Image Image Image Image Image Image Image Image Image Image Image Image Image Image Image Image Image Image Image Image	Y

Browse - to select a file

Reset – clears Path, File, Type

image - (only for stacks) read in one image from a stack (select using Image#)-1

Cancel - dismiss the STXM (sdf) read in widget

OK - read the file, using the selected options

Preview – if set, display NeXus data

I-ring norm ? – if checked, all data intensities are adjusted as if ring current is defined value I-ring norm value CLS (cryo-STXM) – 200 mA; Soleil – 500 mA

NEXUS source pixelator (SLS, Bessy, Soleil, Diamond) or pySTXM (CLS cryro)

xy correct ? - if checked, and the data was recorded, shifts position of each pixel to that reported by the interferometer guidance system (experimental)

flip image – required for some versions of pySTXM image files

ptycho - read in STXM type images generated when measuring in ptychography mode **Channel** - select data channel from pull down list, generated from header

Region - select spatial region (area or point) from pull down list, generated from header **Image #** - select specific image of multi-image stack

Start time - clock time at start of acquisition

Elapsed time - time of acquisition

Data time - time predicted from dwell and line delays, assuming no other delays

Efficiency – ratio of data / elapsed time

Energy (eV) – photon energy

Dwell time (ms) – dwell time

Polarization – parameter for photon polarization (converted to LCP, RCO, Lin-H, lin-V and displayed on y-axis label

READ (continued)

PEEM (Lox) – Reads data written by **Lox**, the data acquisition for the CLS PEEM (called CaPeRS = Canadian Photoemission Research Spectromicroscope).

I Read Lox Format files	×
Path E:\aXis-Pass-Test-data\00-READ\03-PEEM-lox\080607004-stack-PEEM\	
File 080607004 Browse Parameters Cancel	
Type stack Scan Type PEEM Map 1 image spectrum OK	
Energy (eV) Dark level 0.0 Field of View 20.0	
Ring Current (mA) 151.95	
✓ I-ring norm? Data Channel all channels ▼ Region 1 ▼ Image Energy 1950.0	•

Lox data is described by a header file (*.lox) which contains the information needed to identify the type of data contained in the associated data files, along with all data acquisition and PEEM parameters. After selecting a file via its associate *.lox file, the Read Lox widget can be used to :

Browse – to select the file (or edit the filename box)

Parameters - list the header, which contains all microscope parameters

Data Channel - select from pull down list, generated from header

Region - select from pull down list, generated from header

I-ring norm? – if checked, all data intensities are adjusted as if Ring current is 500 mA

Image Energy - select specific image of multi-image NEXAFS Image scan
 Map - (only for a stack) - convert a 2-imagestack into an OD difference map
 1 image - (only for NEXAFS Image Scan) read only the image identified in the image energy pull down list (which displays the photon energy)
 Image Energy (eV) - list of energies of all the images in a stack
 Dark Level - set camera dark level
 Field of View - set field of view of the image (microns)
 Cancel - dismiss the ALS STXM read in widget

Selecting **OK** then reads the information in the associated binary image (*.tif) or ascii spectral (*.lox) files into one or more aXis2000 buffers. Image sequences are converted directly to the aXis2000 binary format (*.ncb).

READ (continued)

Images

AXIS – images written in aXis2000 binary format (*.axb)
This is useful for saving derived results. It is the default output
format, and the required input for some routines

ALS-xyt – file format for pattern generator (STXM)


Bessy	>	STXM (old)
Graphics	>	TXM

Graphics - standard formats (BMP, GIF, JPG, PNG, TIF).

TIF format handles 1-channel & 3-channel (RBG) formats For each image format one can read the image as **image** (un-modifiable, preserves colors)

or as **data** (modifiable, pixel indices as (x,y)-values)

CAUTION: there are known bugs in these routines, with some inversions and strange color distortions

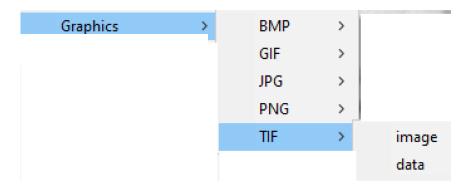

AXIS ALS-xyt Bessy > Graphics > NSLS Σ PEEM > Ptychography > ROL Σ SPEM > Text > Twinmic > **TXRM** Σ XRF > Other >

 NSLS – read images written by NSLS I STXMs (pre 2012 or so)

 old (*.nc) – prior to ~2002 (NetCDF)

 stxmIV – last used data format

 cryo - format from cryo-STXM

old (*.nc) stxmIV cryo

READ~Images (continued)

PEEM

ALS-PEEM2 – reads in 12-bit and 16-bit ALS-specific formats with a **widget.** (NB the **Elmitec** read command uses the same structure to define image and image sequence parameters)

NB – this routine may not work in the Virtual Machine (*.sav) version

	Bin image after		
	processing		
Energy, scale	PEEM Read Widget	×	
Select data file	First /single data file Browse F-speem\0106\ps2pm8\pspm5\pspm5#020.TIF Photon Energy (eV) Pixel scale (nm) #pixels to bin dwell (s)	Processing Options	 All possible read-in combinations
Define region in μ m units ——	286.80 80 1 5 X-min X-max Y-min Y-max REGION:-	C gain correct	median smooth after processing (remove hot pixels)
Select last data file	Browse Last data file PEEM dark file Image: state of the state of th	☐ median smooth ☐ 12 bit data	All tif files must be either 12-bit (if clicked on) or 16-bit (if clicked off)
Select dark file Select gain file (12-bit 'white')	Browse F:\peem\CCD_corrections\12-bit\white_12_021.tif Area of Interest file A0Pdark Browse F:\peem\0106\ps2pm8\pspm5\pspm5.aoi	Read data Cancel	REGION Select portion of image
file to define area of interest (AOI) for gain or dark signals (if these are only available as full images)	aXis 2000		after processing 🔨 Average multiple dark files

ALS-PEEM3 – reads data format for PEEM3 (implemented Jan-2007, Andreas Scholl)

Elmitec - read PEEM files.

- dat read in 16-bit (12-bit encoded) files written by UView2002
- tif read=-in 8-bit (3-channel grayscale) exported by UView2002

Lox-PEEM – read

NSRRC – PEEM

Mephisto – read PEEM data from Mephisto (old binary 512x512 from a CCD)

ALS-PEEM2

ALS-PEEM3 Elmitec

Lox-PEEM

NSRRC Mephisto dat

tif

ALS-PEEM2 ALS-PEEM3 Elmitec > Lox-PEEM > NSRRC Mephisto

READ~Images (continued)

Ptychography 11.0.2-display 11.0.2-display II.0.2 display – animation of ptycho data from 2011-2012. Solici if file generated by Soliei] tycho acquisition (2019 version) – superceded by *.hdf5 file Shapiro - output of Nov-2012 ptychography image analysis ROI – region of interest definitions for Lox – ROI for Lox format PEEM Pem2 – ROI (=AOI) for peem2 data aXis2000 stack – ROI for stack region selection (CJJ, CZ) Iox SPEM ALS-SPEM – read in images recorded in XPS or NEXAFS mode using the ALS SPEM NSRRC SPEM read in images recorded with Taiwan PEEM ALS-SPEM NSRRC SPEM Text - read in images written as an array of Ascii (ic readable with a text editor like Notepad), with or without standard aXis2000 header ro_header Twinmic - read in images from Twinmic (Elettra) STXM Transmission Fluorescence Variantic ion fluorescence Variantic ion fluorescence TXRM - read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] Alba.Mistral Xradia Alba.Mistral Xradia NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Alba.Mistral Xradia Xradia CLS SGM - from Amptek (spectral mode as an array) Twinmic - XGI abs data from Twinmic Ascii image ALS-STXM-7.0 image files (ascii) – data channels: ALS-STXM-7.0 image files (as			_		
11.0.2 display – animation of ptycho data from 2011-2012. Stormage > Shapiro Soleil tif file generated by Soleil ptycho acquisition (2019 version) – superceded by *.hdf5 file Shapiro – output of Nov-2012 ptychography image analysis ROI – region of interest definitions for Lox – ROI for Lox format PEEM Pem2 – ROI (=AOI) for peem2 data aXis2000 stack – ROI for stack region selection (CJJ, CZ) Iox SPEM ALS-SPEM – read in images recorded in XPS or NEXAFS mode using the ALS SPEM NSRRC SPEM read in images recorded with Taiwan PEEM ALS-SPEM NSRRC SPEM read in images recorded with Taiwan PEEM Text - read in images written as an array of Ascii (ie readable with a text editor like Notepad), with or without standard aXis2000 header mo_header with_header Twinmic - read in images from Twinmic (Elettra) STXM Transmission Fluorescence Twinmic > transmission fluorescence Alba.Mistral Xradia XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Toscan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic Ascii image Asis image ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (lo); - im1 = transmitted signal; - im2 = other (e.g TFY, luminescence, etc) Ascii image ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	Ptychogranhy	Ptychography	>		
11.0.2 display – animation of ptycho data from 2011-2012. Soleil tif file generated by Soleil ptycho acquisition (2019 version) – superceded by *.hdf5 file Shapiro - output of Nov-2012 ptychography image analysis ROI - region of interest definitions for Lox - ROI for Lox format PEEM Pem2 - ROI (=AOI) for pecm2 data aXis2000 stack – ROI for stack region selection (CJJ, CZ) SPEM ALS-SPEM - read in images recorded in XPS or NEXAFS mode using the ALS SPEM NSRRC SPEM read in images recorded with Taiwan PEEM Text - read in images written as an array of Ascii (ie readable with a text editor like Notepad), with or without standard aXis2000 header Twinmic - read in images from Twinmic (Elettra) STXM Transmission Fluorescence Alba.Mistral Xradia [STXM at Shanghai - stacks] NB this only works on a Windows system & needs some special codes AID-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to st that up XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twi	i tyenograpny		>		
Solcil tif file generated by Soleil ptycho acquisition (2019 version) – superceded by *.hdf5 file Shapiro - output of Nov-2012 ptychography image analysis ROI – region of interest definitions for Lox – ROI for Lox format PEEM Pem2 – ROI (=AOI) for peem2 data aXis2000 stack – ROI for stack region selection (CJJ, CZ) ALS-SPEM ALS-SPEM – read in images recorded in XPS or NEXAFS mode using the ALS SPEM NSRRC SPEM read in images recorded with Taiwan PEEM Text - read in images written as an array of Ascii (ic readable with a text editor like Notepad), with or without standard aXis2000 header Twinmic - read in images from Twinmic (Elettra) STXM Transmission Fluorescence TXRM – read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from MeMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinnic – XGLabs data from Twinmic OTHIER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmited signal; - im2 = tother (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	11.0.2 display – animation of ptycho data from 2011-2012	SGM_Image	>	Shapi	ro
Lox – ROI for Lox format PEEM Pem2 – ROI (=AOI) for peem2 data aXis2000 stack – ROI for stack region selection (CJJ, CZ) SPEM ALS-SPEM – read in images recorded in XPS or NEXAFS mode using the ALS SPEM NSRRC SPEM read in images recorded with Taiwan PEEM Text - read in images written as an array of Ascii (ie readable with a text editor like Notepad), with or without standard aXis2000 header Twinmic - read in images from Twinmic (Elettra) STXM Transmission Fluorescence Alba.Mistral Xradia [STXM at Shanghai - stacks] NB this only works on a Windows system & needs some special codes (DL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Loca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (lo); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	Soleil tif file generated by Soleil ptycho acquisition (2019 v	, -	eded b	y *.hdf	5 file
Lox – ROI for Lox format PEEM Pem2 – ROI (=AOI) for peem2 data aXis2000 stack – ROI for stack region selection (CJJ, CZ) SPEM ALS-SPEM – read in images recorded in XPS or NEXAFS mode using the ALS SPEM NSRRC SPEM read in images recorded with Taiwan PEEM Text - read in images written as an array of Ascii (ie readable with a text editor like Notepad), with or without standard aXis2000 header Twinmic - read in images from Twinmic (Elettra) STXM Transmission Fluorescence Alba.Mistral Xradia [STXM at Shanghai - stacks] NB this only works on a Windows system & needs some special codes (DL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Loca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (lo); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	ROI – region of interest definitions for				
Pem2 – ROI (=AOI) for peem2 data aXis2000 stack – ROI for stack region selection (CJJ, CZ) Peem2 aXis2000 stack SPEM ALS-SPEM – read in images recorded in XPS or NEXAFS mode using the ALS SPEM NSRRC SPEM read in images recorded with Taiwan PEEM ALS-SPEM NSRRC SPEM Text - read in images written as an array of Ascii (ie readable with a text editor like Notepad), with or without standard aXis2000 header mo_header Twinmic - read in images from Twinmic (Elettra) STXM Transmission Fluorescence mo_header TXRM - read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] Maba.Mistral Xradia NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up Alba.Mistral Xradia XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GocCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic APS Inca (Oxford) CLS SGM Twinmic OTHHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (loi); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) Ascii image ALS-STXM-7.0 linescan ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	e		lox		
aXis2000 stack – ROI for stack region selection (CJJ, CZ) aXis2000 stack SPEM ALS-SPEM – read in images recorded in XPS or NEXAFS mode using the ALS SPEM NSRRC SPEM read in images recorded with Taiwan PEEM ALS-SPEM NSRRC SPEM read in images recorded with Taiwan PEEM Text - read in images written as an array of Ascii (ie readable with a text editor like Notepad) , with or without standard aXis2000 header Image: mode using the ALS SPEM with neader Twinmic - read in images from Twinmic (Elettra) STXM Image: mode using the ALS SPEM with neader Transmission Fluorescence Image: mode using the ALS SPEM with neader TXRM - read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] Alba.Mistral Xradia [STXM at Shanghai - stacks] NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Alba.Mistral Xradia XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic Ascii image ALS-STXM-7.0 image files (ascii) – data channels:			peer	n2	
SPEM ALS-SPEM – read in images recorded in XPS or NEXAFS mode using the ALS SPEM ALS-SPEM NSRRC SPEM NSRRC SPEM read in images recorded with Taiwan PEEM Text - read in images written as an array of Ascii (ie readable with a text editor like Notepad), with or without standard aXis2000 header Imo_header Imo_header Twinmic - read in images from Twinmic (Elettra) STXM Transmission Fluorescence Imo_header TXRM - read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] Alba.Mistral Xradia [STXM at Shanghai - stacks] Alba.Mistral Xradia NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Alba.Mistral XRF read in X-ray fluorescence (XRF) maps from different systems APS Inca (Oxford) APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (ID); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) Ascii image ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1 Image		J, CZ)	aXist	2000 sta	ack
ALS-SPEM - read in images recorded in XPS or NEXAFS mode using the ALS SPEM ALS-SPEM NSRRC SPEM read in images recorded with Taiwan PEEM Images recorded with Taiwan PEEM Text - read in images written as an array of Ascii (ie readable with a text editor like Notepad), with or without standard aXis2000 header Images recorded with Taiwan PEEM Twinmic - read in images from Twinmic (Elettra) STXM Images recorded with Taiwan PEEM Twinmic - read in images from Twinmic (Elettra) STXM Images recorded with Taiwan PEEM TXRM - read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] Alba.Mistral XRF read in X-ray fluorescence (XRF) maps from different systems APS APS - from GoeCARS XRF microprobe Inca (Oxford) Inca (Oxford) Inca (Oxford) - from McMaster SEM (Tescan) running Xmax SDS CLS SGM - from Amptek (spectral mode as an array) Twinmic Twinmic - XGLabs data from Twinmic Ascii image ALS-STXM-7.0 ALS-STXM-7.0 ALS-S		, ,			
Indecessing the ALS SPEM NSRC SPEM NSRRC SPEM read in images recorded with Taiwan PEEM Text - read in images written as an array of Ascii (ie readable with a text editor like Notepad), with or without standard aXis2000 header Imo_header Twinmic - read in images from Twinmic (Elettra) STXM Imo_header Transmission Fluorescence Fluorescence Imo_header Alba.Mistral Xradia Xradia [STXM at Shanghai - stacks] NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Alba.Mistral Xradia [STXM at Shanghai - stacks] Alba.Mistral Xradia [STXM at Sharghai - stacks] Alba.Mistral Xradia [STXM at Sharghai - stacks] Alba.Mistral Xradia [STXM at Sharghai - stacks] Alba.Mistral XRF read in X-ray fluorescence (XRF) maps from different systems APS APS = from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS Inca (Oxford) CIS SGM – from Amptek (spectral mode as an array) Twinmic Twinmic OTHER - mostly OLD formats Ascii image ALS-STXM-7.0 linescan alinescence, etc) ALS-		ZAES			м
NSRRC SPEM read in images recorded with Taiwan PEEM Text - read in images written as an array of Ascii (ie readable with a text editor like Notepad), with or without standard aXis2000 header Twinmic - read in images from Twinmic (Elettra) STXM Transmission Fluorescence TXRM - read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up XRF read in X-ray fluorescence (XRF) maps from different systems APS - from GoeCARS XRF microprobe Inca (Oxford) - from McMaster SEM (Tescan) running Xmax SDS CLS SGM - from Amptek (spectral mode as an array) Twinmic - XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) - data channels:	e	AT'S			
Text - read in images written as an array of Ascii (ie readable with a text editor like Notepad), with or without standard aXis2000 header no_header with_header Twinmic - read in images from Twinmic (Elettra) STXM Transmission Fluorescence Transmission fluorescence TXRM - read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] Iteransmission fluorescence NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up Alba.Mistral Xradia XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic APS Inca (Oxford) CLS SGM OTHER - mostly OLD formats Ascii image ALS-STXM-7.0 image files (ascii) – data channels: . im0 = OSA signal (Io); . im1 = transmitted signal; . im2 = other (e.g TEY, luminescence, etc) Ascii image ALS-STXM-7.0 linescan ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	6	n PFFM		Norric a	
like Notepad), with or without standard aXis2000 header Image: Standard aXis2000 header Twinmic - read in images from Twinmic (Elettra) STXM Transmission Fluorescence TXRM - read in images written by X-radia software Alba.Mistral Xradia STXM at Shanghai - stacks] NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: . im0 = OSA signal (Io); . im1 = transmitted signal; . im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	TORKE STELT read in inages recorded with furwar				
Twinmic - read in images from Twinmic (Elettra) STXM Transmission Fluorescence TXRM - read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: . im0 = OSA signal (Io); . im1 = transmitted signal; . im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	Text - read in images written as an array of Ascii (ie readab	ole with a text ed	ditor	no_he	ader
Transmission Fluorescence Twinmic transmission fluorescence TXRM – read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] Alba.Mistral Xradia NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up Alba.Mistral Xradia XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic APS Inca (Oxford) CLS SGM Twinmic OTHIER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) Ascii image ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	like Notepad), with or without standard aXis2000 header				
Transmission Fluorescence Twinmic transmission fluorescence TXRM – read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] Alba.Mistral Xradia NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up Alba.Mistral Xradia XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic APS Inca (Oxford) CLS SGM Twinmic OTHIER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) Ascii image ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	— • •				
Fluorescence Twinmic transmission fluorescence TXRM – read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] Alba.Mistral Xradia NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up Alba.Mistral Xradia XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic APS Inca (Oxford) CLS SGM Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) Ascii image ALS-STXM-7.0 linescan ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1					
TXRM - read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: . im0 = OSA signal (Io); . im1 = transmitted signal; . im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1		Trainanta		.	
TXRM – read in images written by X-radia software Alba.Mistral Xradia [STXM at Shanghai - stacks] Alba.Mistral NB this only works on a Windows system & needs some special codes Xradia Xradia (IDL-Java bridge) which are provided in the aXis2000 source package. Xradia Xradia Contact Adam Hitchcock if you need instructions on how to set that up XRF read in X-ray fluorescence (XRF) maps from different systems APS APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS Inca (Oxford) CLS SGM Inca (Oxford) – from Amptek (spectral mode as an array) Twinmic Twinmic Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: Ascii image `` reals . im0 = OSA signal (Io); . im1 = transmitted signal; . im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0.linescan ALS-STXM-7.0.linescan ALS-STXM7.0.1	Fluorescence				
Alba.Mistral Xradia [STXM at Shanghai - stacks] Alba.Mistral NB this only works on a Windows system & needs some special codes Xradia Alba.Mistral NB this only works on a Windows system & needs some special codes Xradia Xradia (IDL-Java bridge) which are provided in the aXis2000 source package. Xradia Xradia Contact Adam Hitchcock if you need instructions on how to set that up APS Inca XRF read in X-ray fluorescence (XRF) maps from different systems APS Inca (Oxford) Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM Twinmic CLS SGM – from Amptek (spectral mode as an array) Twinmic Twinmic Twinmic – XGLabs data from Twinmic Ascii image ALS-STXM-7.0 image files (ascii) – data channels: Ascii image ALS-STXM-7.0 . im0 = OSA signal (Io); . im1 = transmitted signal; . im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0.linescan ALS-STXM-7.0.linescan ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1 ALS-STXM7.0.1 Image files from ALS-STXM7.0.1	TXRM – read in images written by X-radia software	LARIM		nuor	escence
Xradia [STXM at Shanghai - stacks] Alba.Mistral NB this only works on a Windows system & needs some special codes Xradia (IDL-Java bridge) which are provided in the aXis2000 source package. Xradia Contact Adam Hitchcock if you need instructions on how to set that up PS XRF read in X-ray fluorescence (XRF) maps from different systems APS APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM CLS SGM – from Amptek (spectral mode as an array) Twinmic Twinmic Twinmic – XGLabs data from Twinmic Ascii image ALS-STXM-7.0 image files (ascii) – data channels: im0 = OSA signal (Io); im1 = transmitted signal; im2 = other (e.g TEY, luminescence, etc) Ascii image ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	č				
NB this only works on a Windows system & needs some special codes (IDL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1				Alba.N	Aistral
(IDL-Java bridge) which are provided in the aXis2000 source package. Contact Adam Hitchcock if you need instructions on how to set that up XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) Als-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1		cial codes			
XRF read in X-ray fluorescence (XRF) maps from different systems APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1				Aradia	
APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	Contact Adam Hitchcock if you need instructions on how to	set that up			
APS – from GoeCARS XRF microprobe Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	XRF read in X ray fluorescence (XRF) mans from differen	at existems			
Inca (Oxford) – from McMaster SEM (Tescan) running Xmax SDS CLS SGM – from Amptek (spectral mode as an array) Twinmic – XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1		it systems			
CLS SGM – from Amptek (spectral mode as an array) Twinmic Twinmic – XGLabs data from Twinmic Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: Ascii image . im0 = OSA signal (Io); ALS-STXM-7.0 . im1 = transmitted signal; ALS-STXM-7.0.linescan . im2 = other (e.g TEY, luminescence, etc) ALS-STXM7.0.1		ing Ymay SDS			
Twinmic – XGLabs data from Twinmic OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1					
OTHER - mostly OLD formats Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0.linescan ALS-STXM7.0.1		y)			
Ascii image (Reals or Integers ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan ALS-STXM7.0.1					
ALS-STXM-7.0 image files (ascii) – data channels: - im0 = OSA signal (Io); - im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan ALS-STXM7.0.1	OTHER - mostly OLD formats				
ALS-STXM-7.0 image files (ascii) – data channels: ALS-STXM-7.0 integ - im0 = OSA signal (Io); ALS-STXM-7.0.linescan ALS-STXM-7.0.linescan - im1 = transmitted signal; ALS-STXM-7.0.linescan ALS-STXM-7.0.linescan - im2 = other (e.g TEY, luminescence, etc) ALS-STXM7.0.1	Ascii image (Reals or Integers	Accii			<u>.</u>
 im0 = OSA signal (Io); im1 = transmitted signal; im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1 	ALS-STXM-7.0 image files (ascii) – data channels:	_			
- im1 = transmitted signal; - im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	- im0 = OSA signal (Io);		inerer		integ
- im2 = other (e.g TEY, luminescence, etc) ALS-STXM-7.0 linescan – linescan files from ALS-STXM7.0.1	- im1 = transmitted signal;		mescan		
	- im2 = other (e.g TEY, luminescence, etc)	AL2-XIVI I			
ALS-XM1 – data files from full field microscope at the ALS (rudimentary)	ALS-STXM-7.0 linescan – linescan files from ALS-	STXM7.0.1			
	ALS-XM1 – data files from full field microscope at the ALS	6 (rudimentary)			

READ~Spectra

AXIS – read spectra from ascii format files (*.txt) This can be ascii 1-d data written by aXis2000 or many generic formats of multi-column data with or without headers. (default ext. = *.txt)

alignment – alignment (x,y – shifts) from Zimba, or Jacobsen aligners

multi-column – guided read-in of any multi-column, header ascii data file, with ability to skip lines, choose columns, multi-column read-in, etc

Read spectral & other 1-d files	×
Path E:\aXis-Pass-Test-data\00-READ\05-spectra\02-multi-column Browse File Fe 690-730 chito-NSRRC ext bd	Display more
Start Energy 690.000 eV, End Energy 730.000 eV, Scan Points 201, ExpTime 1000 mSec ROI1 is ,ROI2 is Photon Energy , Sample current reading , I0 reading , ROI1 reading , ROI2 reading , Picture SUM 6.9000e+02 , 3.1787e-09 , 1.0082e-09 , 0.0000e+00, 0.0000e+00, 0.0000e+00, 6.9020e+02 , 3.1470e-09 , 9.9898e-10 , 0.0000e+00 , 0.0000e+00, 0.0000e+00,	
<	>
X-axis = column 1 Y-axis (l) = col 3 rows to skip 0 READ ALL LastRow displaye 6 Y-axis (lo) = col 2 convert to OD 2	OK Cancel

AXIS	
alignment	
multi-column	
ALS-PEEM	
CLS-SGM	>
Lox-PEEM	
MaxIV_SoftiMax_h5	
MSA	
NSLS	>
OLD	>
Twinmic	>
XAS	
XRF	>

Browse – select file

Display more – add another 6 lines to the display buffer (to get to end of headers)

X-axis column – select data column for x-axis

Y-axis column – select data column for y-axis

Rows to skip – use LastRow displayed to identify which line to start read in

Read all – read all columns in a multicolumn file (x, many y)

OK – read only the identified (x,y) columns

Cancel – abort widget

Y-axis(Io) – column for Io intensities

Convert to OD $\,$ - use 2 columns to generate OD as ln(Io/I)

ALS-PEEM – spectra from ascii file written by ALS PEEM 2

CLS-SGM	hdf5	
csv – comma separated variables format	11015	
written from web-based CLS-SGM converter software		
[https://sgmdata.lightsource.ca/users/]		

hdf5 – hierarchical data format version 5 – SGM TEY/ transmission and XRF-yield data as stored by the acquisition software. NB this current routine (May 2022) only reads the first entry.

Lox-PEEM – read in multi-column spectra written by Lox (*.lox files)

READ~Spectra (continued)

MaxIV_SoftiMax_h5 – rea	ad in spectra or beamline me	onitoring data
files written in hdf5 format		STXM (old)
e.g. 20211029.h5 (just click of	on a single entry# of the	TXM
multi-entry hdf5 file)		1.70
HDF5 Browser	2.5×10 ⁻⁴	
<u>₽</u> ® <u>8</u> +	2.0×10-4	
F Y'laXis-Pass-Test-data000-READ/05-spectra/06_Max B entry/30 B entry/31	1.5×10 ⁻⁴	γ
	1.0010-	Ŷ
B - entry796 B - entry797	1.0040	
-A NX_class -A file_name -A file_time	5.D×10*	
A creator A HDF5_Version A h5py_version	300 350 400 450 500 Photon energy (eV)	550

Bessy	>
DM-datacube	
FTIR	
PEEM	>
ptycho-pynx	
pty-PIE (MaxIV)	
TXRM	>
XRF	>

MSA - read in Digital Micrograph spectra (TEM-EELS)

NSLS – read spectral data files in formats used at X1A

- **nc** as-recorded (BSIF binary) -
- **stxmIV** stxm IV format (nc, but different than old-stxm)
- **ascii** converted spectral format (generated by an X1A nsls utility) -
- **map** mapper style files (e.g. stack alignment shifts)

XAS - (X-ray Absorption Spectra) format with user settable header set up for bibliography (used for reference spectra, ZSTACK, NSLS, PCA GUI and COREX bibliography) Amptek (*.mca) single spectrum or multiple spectra written to a Inca (Oxford) common energy sampling (x-axis)

XRF

- Amptek (*.mca) XRF spectra written from the Amptek software
- Inca (Oxford) XRF spectra written from Inca (SEM, TEM)
- XGLabs (*.dta) XRF spectra written from XGLabs software
- XGLabs-hdf5 XRF spectra written in hdf5 format from XGLabs software

Read~Stacks

Bessy

STXM (old) read stacks from Thieme / Gottingen scanning TXM

TXM read stacks from cryo-TXM

DM-datacube - converts binary data exported from Digital Micrograph image sequences into a aXis2000 *.ncb stack

XGLabs-text XGLabs-hdf5

nc

stxmIV

ascii

map

Read~Stacks (continued)

FTIR – converts Nicolet Thermo (ver 7) map files (sets of spectra in spatial array) to *.ncb stack (for Soleil FTIR)

PEEM

NSRRC - PEEM stacks from Taiwan Soleil – NeXus format stacks written from Soleil PEEM only versions of IDL above 7.0 can read Soleil NeXus (*.nxs) files All other – converts PEEM stack data from various instruments (Lox, Sphinx, ALS-PEEM2, ALS-PEEM3, ALS-pre-Sep02 (peem2 old format), Other). See BELOW: <u>STACKS~convert format ~ PEEM</u> for view of widget and full description)

Pytcho – PYNX –(Soleil) reads in selected type of tif files (object or probe, amplitude or phase) from sets of folders (1 / energy) OR all-from-1-folder	NSRRC	
Pty-PIE (MaxIV) - reads in multiple reconstructions as sequence of *.txt	Soleil	
files (spectro-ptycho at MaxIV SoftiMax; under development as of May 2023)	all other	
TXRM – stacks from full-field microscopes at Alba and SSRF Alba-Mistral	Alba.Mistral Xradia	
Xradia (SSRF, Shanghai)		
XRF – read in stacks of X-ray fluorescence images	Inca STXM_control 🕨	
Inca – converts X-ray fluorescence (XRF) maps written from the Bruker Inca raw export into a *.ncb stack	XGLabs 🕨	
STXM control		
one energy - converts XRF-maps measured at a single photon energy using STXM_control to a *.ncb stack	one energy multiple energies	
multiple energies - converts XRF-maps measured at multiple photon energies using STXM_control (stack-of-stacks) to a *.ncb stack with summing over user selected X-ray fluorescence energy range to make an XRF-yield stack		
XGLabs – converts XRF-maps written by the Labview software controlling the Eletrra Twinmic STXM to a *.ncb stack starting from	text (*.dta) hdf5	

text (*.dta) or hdf5 data files

WRITE store results (images, spectra, etc) for later use or transfer to other programs.

AXIS - automatically selects file type depending on buffer contents
– spectra written with header in ascii (*.txt)
- images written with header in Z-matrix binary format
using IDL system-independent binary coding (*.axb)
Graphics
GIF – writes current Main Image (with any annotation etc) as a GIF file

- image (exactly as seen on main screen of aXis2000)
- data (the image without axes or labels)
- JPG writes the current Main Image (with any annotation etc) as a JPG file
 - image (exactly as seen on main screen of aXis 2000)
 - data (the image without axes or labels)

PNG – writes the current Main Image (with any annotation etc) as a PNG file

- image (exactly as seen on main screen of aXis 2000)
- data (the image without axes or labels)
- TIF writes the current Main Image (with any annotation etc) to a TIF file.
 - image (exactly as seen on main screen of aXis 2000)
 - data (the image without axes or labels)

ALS-xyt – file with point-by-point (x,y,t) values to create patterns using **pattern_generation** function of STXM_control. NB after reading in a graphics imge (tif, jpg etc), the *Images~Set XY Scale Utilities~change mesh* and *Spectra_gain* functions can be used to adjust size, point spacing (typically 50 nm) and intensities (0-1) in the *.xyt file this writes. At the STXM, the pattern_generation routine can then adjust exposure time through a multiplier.


ascii image – write image to array of Real or Integers for export to other programs (e.g. excel)

NSLS-image (*.nc) – writes NSLS <u>netCDF</u> image format (*.nc) - used in stack_analyze

SDF format – write <u>self defining file</u> format [*.hdr, *.xim (*.xsp) files for images (spectra)]

XAS single/multiple - writes one or more spectra which are displayed in the main viewing window of axis2000 in XAS format with optional definition of detailed header. This is a useful way to transfer multi-spectral data for figures in a scientific plotting program like Sigma Plot, Origin etc

AXIS	
Graphics	>
ALS-xyt	
ascii image	>
NSLS-image (*.nc)	
SDF format	
XAS single/multiple	



ZOOM (for images and spectra)

Image (NB –since expanding the scale is
performed by cutting out the region of interest,
the cursor-cut and numerical-cut commands can
also be used to extract sub images)

Pan – pops-up a zoom window with a ~3x expansion

of the region around the cursor. Move the cursor on the

main image to look at different areas. Left click to change zoom factor. Right clock to end zoom. If the continuous lineouts option button at the bottom of the aXis2000 screen is OFF, then the zoomed image is only updated on each left mouse click.

Image

Spectra

Pan

Cursor - cut

Numerical-cut(in data units)

>


Cursor – **cut** - stretchable box cursor used to define region. Data is cut from the displayed image and shifted to the working buffer (0).

Numerical – **cut** - numerical selection of range. Data is cut from the displayed image and shifted to the working buffer (0). The last values used to define the limits are saved and used the next time *zoom~image_numerical* is used, which allows accurate extraction of regions from many images (e.g. a set of component maps from fitting)

Spectra

ll a	Image	>	
Cursor -Stretchable box cursor	Spectra	>	Cursor
Normal - return plot to full X-scale, same Y-scale			Normal
Out x2 - useful to "make white space" for comparison			Out x2
overplotting (also can use z-limits)			Numerical
Numerical - select numerical limits			

- as with *zoom~image_numerical*, the limits are preserved

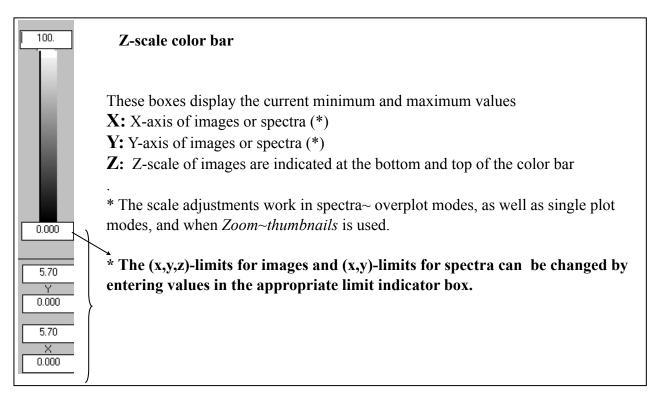

return to top menu

FILTER (for images and spectra)


5 types of smoothing with selectable parameters. **Clean (FT image filter)** works only with images. The other four apply to BOTH images and spectra.

Smooth – Boxcar average over n-points (right to edge of images) in odd

Clean (FT image filter) - 2d-FT filter. The FT is displayed on a 1:1 pixel format. Use the rubber-band style cursor (click, drag mouse, click a

second time) to define the data in the complementary frequency domain to delete. The reverse transform of all data but the rejected data is displayed in buffer 9. The centre of the FT image corresponds to 0 (dc), while positions farther from the centre correspond to higher frequency. Periodic (moiré) noise associated with aliasing (beating) of a systematic noise signal with stxm sampling can be cleanly removed by deleting strong (typically linear) signals in the FT.

The **Clean (2d-FT Image filter)** can be used with subtraction of the filtered result to perform highpass or selective band-pass filtering. For example -

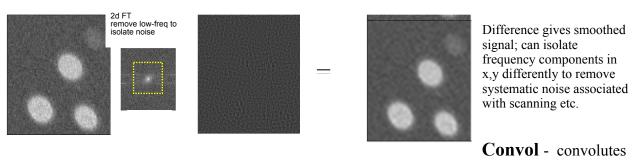

with user-definable digital filter (definable frequency response)

Deglitch - -graphics-driven deglitch routine. Cursors identify lower and upper bounds of data.

Despike – local filter to remove point (spike) artifacts. User selects width of a median filter to identify the spikes. (NB the "**Despike stack**" routine in **Jacobsen's stack_analyze** works better)

Median - n-point Savitsky-Golay averaging, except at edges

Lee Filter – Lee filtering smooths image noise by generating statistics in a local neighborhood and comparing the result to the expected values

Smooth
Clean (FT image filter)
Convol
Deglitch
Despike
Median
Lee Filter

return to top menu

IMAGES (processing of images)

	Add	>
Add	Average pixels	>
- Append - append 2 images, matched on basis of (x,y) scales -	bin	
	Calibrate XY	>
images can be tessellated using append.	Clip signal	>
- Buffer – weighted addition of two buffers	Change	>
(use a negative weight to subtract buffers)	Convert_to_OD Delete region	
- Constant - Add a constant to each pixel of an image	Distort XY scale	
	Fix rollover	>
(use a negative constant for subtraction)	FRC - resolution	
	Gain	>
Average pixels - compute average intensity in a user-defined region	generate mask	>
	histogram	
whole image – all pixels - full image	Modify one point	
whole image - ignore zeros - same, but does not include zeros	Modify X,Y axes	
region- all pixels - select pixel region of interest; report average	Multiply buffers Particle analyze	
Z-value with statistics	Power	>
region- ignore zeros - as for all pixels, but does not include zero	Profiles	>
	Ratio to	
values. This is useful if an image has been multiplied by a <u>masked image</u> and	Remove zeros	
the areas of interest are not contiguous. Use to count pixels and thereby	Replace line	>
determine areas of selected regions of an image.	Resize	
actermine areas of selected reprons of an image.	Set XY scale	
	Transform	>
bin – reduce image size (& improve statistics) by binning (2x2), (3x3), etc	Warp	

bin – reduce image size (& improve statistics) by binning (2x2), (3x3), etc pixels to 1 pixel

Calibrate XY - calibrate X,Y scales of images

- **1-point** shifts current image to make selected point have user-defined (x,y)
- 2 points allows linear stretching as well as shifting

NB: The calibration routines are similar to those used in Stacks~Image alignment. They can be used to manually process the first and last images of a sequence in order to ensure that the x,y limits selected will be present in all files.

Note that once the parameters have been entered to calibrate ONE image, these are saved, so it is easy to apply the same calibration to a number of images, as a manual alignment process. For example, if a few-image stack is measured one energy at a time, **Calibrate XY** is an easy way to generate roughly aligned images. One can then write out the xy-calibrated images, then make a stack list (*.sl) file using a text editor, like NotePad, then use stacks~Analyse~stack list input to assemble the set of xy-calibrated images into a stack, which can be aligned further (if needed) using the Jacobsen or Zimba stack align routines.

Example of a stack list file: [1st line is path to data; successive lines are the file names] Y:\aXis-Pass-Test-data\05-STACKS\00-ANALYZE\01_STACK_LIST_INPUT\ 12_055.axb 12_056.axb 12_057.axb 12_058.axb 12_059.axb

	dwell
Change dwell – change dwell per pixel (ms)	energy
	header
energy – change photon energy (eV) or equivalent parameter	mesh
header – modify header (this is what will be saved to disk)	x_label
mesh - redefine numbers of pixels (images) or points (spectra). This is useful to match pixelation of different mages. Many routines in aXis200-	– y_label
can modify pixel count by 1 or 2 pixels. Change~mesh can be used to	
make(x,y) pixilation of a set of images the same	

x_label – change X- label (scale bar, energy, dwell)

y_label - change Y-label (polarization, etc)

Clip signal

replace all values outside user-selected limits with a fixed value (default is the average of the in-bounds data). select the lower & upper limits by **Histogram** – use cursors on a plot of a histogram of z-values **Numerical** – use text input

- **Convert_to_OD** compute <u>OD</u> (optical density) representation of a transmission image with user defined Io value. The default is the maximum value pixel in the image (typically this is too large should use *image~average pixels~region- all pixels* in a hole area of the image to get a more precise OD)
- **Delete region** use box cursor to define a region to replace with user selected value. (this is useful to remove glitches or to select part of a masked region).

Distort XY scale - distort (x,y) scaling. Pixels interpolated to square in new co-ordinates


Fix rollover - for some image files (e.g. ALS PEEM) it is possible to have signed or unsigned formats which leads to 'roll-over' for pixels with above 16 K counts (e.g. if an unsigned integer data set is read using a signed integer). This replaces all pixels with a -ve value with 65,535 plus that value. Similarly, in phase outputs from ptychography reconstructions, many reconstruction programs automatically 'fold back' phase values such they lie between $-\pi$ and $+\pi$

2pi – replace points after increase of 2pi by previous value -3.14159	2pi
- replace points after decrease of 2pi by previous value +3.14159	2**16
	user_defined

2**16 replaces all pixels with a -ve value with 65,535 plus that value


user_defined – user specifies the 'rollover' threshold criteria and the value to increment (if pixel value goes –ve across threshold) or decrement (if value goes +ve across threshold)

FRC – **resolution** – apply Fourier Ring Correlation algorithm to a <u>square image</u> to estimate spatial resolution. FRC curve crossing 0.5 and the ½-bit line are used to estimate the ½- pitch spatial resolution. For the equivalent full width at half maximum (FWHM) multiply by 2.

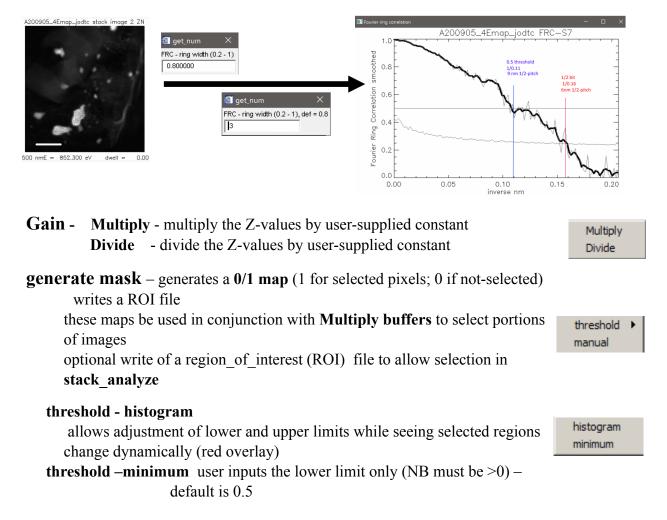

manual – use region definition tool to select a particular region for stack area selection. NB this ROI selector is also used in e.g. *images~delete region* and *stacks~analyze~Zimba*

threshold region selector

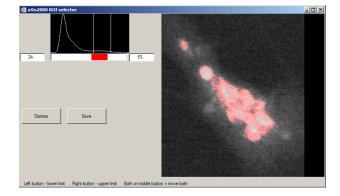

manual region selector



histogram – compute the histogram of all the pixels in an image

- **Modify one point** allows modification of a pixel (NB use **Delete region** for area modification) Left click to add, right click to delete; in each case prompt is a local average
- **Modify x,y axes** applies a scale factor to the numerical axes of an image (useful if there is a known distortion of a scanning system)
- Multiply buffers take product of the current and a second, user selected buffer
- **Particle analyze** when applied to a <u>masked image</u> (0/1 pixel values only) it analyzes the areas of contiguous regions and reports a distribution of diameters, assuming circular areas.

Power

- exp(Z) – exponential of z	exp(Z)
- ln(Z) - natural log of z-values	ln(Z)
(use to convert Transmittance to Absorbance)	10^(Z)
- 10^(Z) – raise z-values to 10	loq10(Z)
- log10(Z) - base-10 log of z-values	

Profiles - generate and save intensity profiles from images

Linear – intensity along line defined by two user selected points **Radial** – intensity as a function of angle in a circular region. The user defines a diameter which is then rotated about its center. Optionally, the resulting 'unfolded' radial distribution can be symmetrized by auto-seeking a threshold level and aligning at that common level. (This routine was written to explore <u>radial distributions in particles</u>. It is also useful for analysis of azimuthal orientation effects probed by linear dichroism.)

Ratio to - computes ratio of 2 buffers with optional scaling. Images are matched by (x,y) scales

Remove zeros – replaces zero value pixels with a local average. (despeckles images with dropouts)

		horizontal	>	auto
Replace line	for each direction:	vertical	>	manual

Auto automatically identifies 'bad lines' (ones with pixels that deviate beyond expected statistical fluctuation (3 sigma) and replaces those lines with adjacent line(s)

Manual - use cursor to identify horizontal lines to remove. The selected line will be replaced by the average of 2 adjacent lines (default) or by any selected line, as the user chooses. The line suggested is the (n+1) line (the one above the selected line). Cursor line value is

indicated during replace line selection. This is useful for images which are acquired line-at-a-time which can fail on the triggering of a line resulting in a line with only '0' values. Numerical selection of the line to replace allows access to un-displayed lines in large images. Use the **pixel indicator** to determine the line number

X	263.05	9
Y	701.08	20
Ζ	12311.	

Resize - set size of image in terms of # of pixels explicitly (this is needed to correct rounding errors in re-pixelation steps (e.g. shifts, truncates etc) whenever 2 or more images have to have identical numbers of (x,y) pixels for subsequent processing (same as *utilities~change mesh*)

Set XY scale - calibrate distance scale by defining distance between two user-selected points

Transform – common image modifications	Flip
	Mirror
Flip – invert image vertically through a horizontal centre line	Rotate

- Mirror invert image horizontally through a vertical centre line
- **Rotate** rotate image about a user defined point, by user defined angle. This can be used in conjunction with *Images~Distort X,Y scale* to remove image distortion by symmetrizing an object of known shape (e.g. circular particles).
- **Warp** –uses multiple matching point "morphing" capability of IDL. Intended to handle cases where a 2-point or 1-point manual shift will not compensate for changes in the sample shape in a stack (the 'warping' usually occurs because of radiation damage).

return to top menu

STACKS - manipulation of image sequences.

Note, the ability to simultaneously manipulate multi-dimensional data sets (3,4,5 & more) is one of the strengths of aXis2000, combining aspects of both image and spectral manipulation.

Analyze

Stack process

- loads an AXIS binary stack format file (*.ncb) into the **stack_process** widget. Note that it is convenient to store image sequence data in this binary representation since it is much more compact (by three times or more) than original data formats. Since it is possible to extract images from the binary file and since the IDL cross platform binary formatting is used, no information is lost.

The user is promoted for an alignment file (to incorporate alignment shifts into data) and a **widget size scale factor**, before the following widget appears. The *.aln files are written by the Zimba_align or stack_align (early Jacobsen) procedures

stack process

stack list input

Zimba

Jacobsen stack analyze XRF stack-of-stacks

The default **widget size scale factor** will make the stack_process widget fill $\frac{1}{2}$ of the computer screen. For very large stacks, one can use a fractional **widget size scale factor**. This will display and allow visualization. HOWEVER, when the scale factor is < 1, many of the data modification actions of stack_process do not work

Add Append bin > change mesh or size convert to OD with line lo convert format > Differentiate Expand Fix rollover > Generate_stack y_illumination correct Image alignment > maps > RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Statistical analysis >		
Append Append bin > change mesh or size convert to OD with line lo convert format > Differentiate Expand Fix rollover > Generate_stack y_illumination correct Image alignment > maps > RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Statistical analysis >	Analyze	>
bin > change mesh or size convert to OD with line lo convert format > Differentiate Expand Fix rollover > Generate_stack y_illumination correct Image alignment > maps > RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Statistical analysis >	Add	
change mesh or size convert to OD with line lo convert format > Differentiate Expand Fix rollover > Generate_stack y_illumination correct Image alignment > maps > RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Statistical analysis >	Append	
convert to OD with line lo convert format > Differentiate Expand Fix rollover > Generate_stack y_illumination correct Image alignment > maps > RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Statistical analysis >	bin	>
convert format > Differentiate Expand Fix rollover > Generate_stack y_illumination correct Image alignment > maps > RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Statistical analysis >	change mesh or size	
Differentiate Expand Fix rollover > Generate_stack y_illumination correct Image alignment > maps > RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Statistical analysis >	convert to OD with line lo	
Expand Fix rollover > Generate_stack y_illumination correct Image alignment > maps > RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Statistical analysis >	convert format	>
Fix rollover > Generate_stack y_illumination correct Image alignment > maps > RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Statistical analysis >	Differentiate	
Generate_stack y_illumination correct Image alignment maps RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Statistical analysis	Expand	
y_illumination correct Image alignment > maps > RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Statstistical analysis >	Fix rollover	>
Image alignment > maps > RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Stack_movie >	Generate_stack	
maps > RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Stack_movie >	y_illumination correct	
RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Stack_movie >	lmage alignment	>
Ratio to another stack Rotate Slicer (3d viewer) Stack_movie Statistical analysis >	maps	>
Rotate Slicer (3d viewer) Stack_movie Statistical analysis >	RGB - color composite map	
Slicer (3d viewer) Stack_movie Statistical analysis >	Ratio to another stack	
Stack_movie Statistical analysis >	Rotate	
Statistical analysis >	Slicer (3d viewer)	
,	Stack_movie	
Tomography >	Statistical analysis	>
	Tomography	>

<u>STACKS~stack process</u> (continued)

🗃 Stack Process: bio#4csj	- 🗆 ×
Display min, max: -0.36 1.86	Dismiss IDL Slicer IDL Slicer3
Gamma: 0.50 Colors Rescale	
X: min, max: 0.00 25.03 x,y-scale	
Y: min, max: 0.00 25.18 Zoom Reset	
E: min, max: 282.02 315.03 E,I-scale	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
t: min, max: 0.15 1.24 Reset	an an the second se
Movie C Play 💿 Stop C Pause/Step	1 M 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
file0001: 282.024 eV 0.00 msec file0002: 282.624 eV 0.00 msec file0003: 283.224 eV 0.00 msec file0004: 283.824 eV 0.00 msec file0005: 284.224 eV 0.00 msec file0005: 284.224 eV 0.00 msec file0006: 284.474 eV 0.00 msec	
t all Add region pixel Reset map ROI file bioNi#4cs-alb despike remove bad lines	
I0: file Add region pixel Reset remove image	5 micro 288.22 eV
T/y= transmission ->OD T(E) convert OD -> I-t	Data
avg stack median smooth E_cal change energies	Manipulation
process select command 💌 X,Y calibrate change X,Y axes	1.2
Path Y:\data\XRMivesuits\WVRI\BioNi#4-ST: OUTPUT	- 0.8
Name: bioNi#4cs-alb Menu	0.4 0.2 N
Spectrum ".txt" Region ".roi" Image(s) Rotate 90	0.01
Image ".png" Movie "m.gif" Stack ".ncb"	eV

Notes

- 1. click on spectrum to select image at that energy (ro click in the image list)
- 2. process 'select command' pull down menu contains many full-stack actions:

select command
+/- constant
+/- spectrum
+/- image
* constant
* spectrum
* image
/ constant
/ spectrum
/ image

aXis2000 manual - 08 May 2023

DISPLAY CONTROLS

Display min, max – Z-axis limits

Gamma – gamma for Z-axis

Colors – select from palette of standard IDL color tables

Rescale – [ON] min/max each image. [OFF] – use the display min, max settings

X: min, max – use to set the x-scale of image (for precise region selection)

Y: min, max – use to set the y-scale of image

Zoom – graphical expansion of image **Reset** restore full stack (x,y)

E: min, max – use to set the energy range of the spectral display

I: min, max – use to set the intensity range of the spectral display

Reset – reset (E, I) scales to full scale values

Movie – play – play the move

- **stop** stop playing movie
- pause/step pause, or advance one frame

Image parameter list -select image by clicking or using arrow keys to scroll up/down

DATA MANIPULATION CONTROLS

I: all - display average spectrum of all pixels (treated as I in Beer's Law or TEY)

Add region - display average spectrum of an I region selected by polygon draw selector pixel - display average spectrum of a selected pixel
 Reset - reset selection of I pixels

map – use 2 (A-B) or 3 (A-(B+ \dot{C})/2) selected images to take make a chemical map ROI file – click to browse & select a *.roi (region of interest) file

despike - replaces zero value pixels with a local average.

remove bad lines – replace lines \sim auto applied to all images in a stack

Io: file - browse to select spectrum as Io (treated as Io in Beer's Law or TEY)

Add region - display average spectrum of an I region selected by polygon draw selector

pixel - display average spectrum of a selected pixel as Io

Reset - reset selection of Io pixels

remove image – remove currently displayed image from the stack

```
T/y = switch between transmission and yield (electron, XRF etc) modes
```

->OD – convert Z-values from transmission to optical density using currently defined Io T(E) toggle between absorption (-ln(I/Io) and YIELD type TEY (I/Io) normalization

```
(the current status is displayed between ->OD and TEY boxes)
```

convert OD \rightarrow I-t – convert absorbance to transmittance using user-supplied Io

avg. stack - compute average of all images within the DISPLAYED E-min/ E-max range

& store as a file and in a selected aXis2000 buffer

median smooth – apply 3-point median smooth to all images

E_cal – calibrate the energy (linear shift by user selected amount)

change energies – exchange current energies of stack for those in a selected file

process **select command** – modify stack (see next page for description of commands)

X,Y calibrate – define width of stack area (aspect ratio is preserved)

change X.Y axes – replace present (x,y) values with those from an external file

process select command :

- +/- constant subtract a constant from z-values of each image
- +/- spectrum subtract a spectrum (*.txt) from spectrum at each pixel
- +/- image subtract image from file (*.axb) from each image in the stack
- * constant multiply each image by a constant
- * **spectrum** multiply stack by a spectrum (*.txt)
- * **image** –multiply each image in stack by an image (*.axb) (use for masking)

/ constant – divide each image by a constant

- / **spectrum** divide stack by a spectrum (*.txt)
- / image –divide stack by an image (*.axb) (use for masking)

OUTPUT MENU

Path – defines the path for input / output files (default is folder that contained the stack) **Name** – filename to be used for output

Spectrum ".txt" – write displayed spectrum

Region ".roi" - write currently selected pixel set to file (mutiple regions are supported)

Image(s) – write displayed image

or all the images to a variety of formats **Rotate 90** – write out stack after rotating the

stack clockwise or counterclockwise by 90°

Image ".png" – write current display (image and spectrum) to a *.png format file

Movie "m.gif" – write images or {images & spectra"} as a movie

The stack_analyze routines generate a multi-gif file which is 'clunky' and the *.mgif file written does not play due to licensing issues. The **AVIMaker** from Platypus software (<u>http://www.c-point.com/</u>) can be used to makes *.avi files from the set of *.gif files written by the Movie command. Alternatively a *.gif movie ca be created using the Easy Gif Animator (<u>https://www.easygifanimator.net/</u>). The individual gif images are required as input t so answer 'N' when asked, *"delete all *.gif files?"*

ALSO – while the routine is SUPPOSED to store the images in the default folder (the one containing the stack), it often ends up in a different folder, typically the source code folder (C:\aXis2000), and sometimes the (n-1) active folder. Good luck hunting for the *.gif files !!!

Stack ".ncb" – write the stack data within the displayed E-range as a *.ncb stack. Thus to extract a subset of the energies of a stack, modify the E-range by setting E-min/E-max in the 'Display Menu". The spatial region stored is selected by defining the row / column pixel values (default is all area of the stack). The user is asked to define the lower and upper row and column indices for the saved data, thus allowing removal of the edges of a stack which might be distorted by the alignment procedure. The *.ncb binary file generated is need for the stack-fit and stack-SVD routines. The save stack ".ncb" routine saves whatever is currently displayed in stack process. In order to use curve fitting routines with reference spectra it is necessary to normalize to Io and convert to OD scale (transmission measurements) or divide by an appropriate reference for yield data and then save the stack.

select command +/- constant +/- spectrum */- image * constant * spectrum * image / constant / spectrum / image

Format (0=*.nc, 1 = *.axb, 2 = *.bmp, 3 = *.tif(long), 4 = *.tif(float)), 5 = text

Format (0=*.nc, 1 = *.axb, 2 = *.bmp, 3 = *.tif(long), 4 = *.tif(float))

COMMANDS AT THE TOP RIGHT OF THE **STACK PROCESS** WIDGET

Dismiss – exit stack_process widget

IDL slicer – start widget for 3d display of stack (early version of the slicer widget) **IDL slicer3** – advanced 3d manipulation of stack using latest IDL Slicer widget

Stacks~Analyse (continued)

stack list input

- generate a stack from a stack_list file (*.sl) and (optionally) alignment (*.aln) files. If you cancel after selecting the first file, then


stack process stack list input Jacobsen stack analyze XRF stack-of-stacks Zimba


stack_build_list is started. If you select a stack_list and then cancel after selecting the second file, then *stack_align* is started (note this has different alignment properties than either *stack_analyze* or *Zimba* aligners, but is generally inferior to either of those routines). Once these choices are made the **stack_process** widget (described above) is started. This command is used to assemble a stack from individual images or to re-assemble a stack, which has been written out as separate files, and has, for example, some modified images. Remember to write out the re-assembled stack !!

Jacobsen stack analyse – starts the Jacobsen stack_analyse widget, which is a complete spectromicroscopy data processing package. The version accessed by aXis2000 is from Sep 2008. More recent versions may exist. See the documentation for that widget, from Chris Jacobsen's web site. The capabilities of this package are extraordinary. The alignment routine is exceptional. Apply it many times until the (x,y) deviations are less than 0.1 pxiel. After alignment, trim (Save autoclipped stack '.stk' file) and then Save axis '.ncb. file.

Menu under 'File'

Inchange Staal	Analyze
Build stack list isli file	•
Write stack list ".sl" file	een)
Read stack ".stk" file	
Read aXis stack ".ncb" file	
Read I0 csv (ev,khz) file	
Save stack ".stk" file	
Clip to square and save ".stk" file	
Clip to I region and save ",stk" file	
Save autoclipped stack ".stk" file	
Save aXis ".ncb" file	
Apply = aln = alignment file	
Align stack	
Manuairy align stack	
Save ", aln" alignment file	
Despike stack	
Despike stack	
Despike stack Noise filter	
Despike stack Noise fiter Save all but movie, data Save spatial region ".roi" Save spectrum ".xas"	
Despike stack Noise filter Save all but movie, data Save spatial region ".roi" Save spectrum ".xas" Save PNG spectrum "s.png"	
Despike stack Noise filter Save all but movie, data Save spatial region ".roi" Save spectrum ".xas" Save PNG spectrum "s.png" Save image ".png"	
Despike stack Noise filter Save all but movie, data Save spatial region ".roi" Save PNG spectrum "s.png" Save image ".png" Save GIF movie "m.gif"	
Despike stack Noise filter Save all but movie, data Save spatial region ".rof" Save spectrum ".xas" Save PNG spectrum "s.png" Save image ".png" Save GIF movie "m.gif" Save MPEG movie "m.gif"	
Despike stack Noise filter Save all but movie, data Save spectrum ".vroi" Save spectrum ".vroi" Save PNG spectrum "s.png" Save INF spectrum "s.png" Save INFEG movie "m.gif" Save MFEG movie "m.gif" Save GIF movie "m.gif" (no spectrum)	
Despike stack Noise filter Save all but movie, data Save spatial region ".rof" Save spectrum ".xas" Save PNG spectrum "s.png" Save image ".png" Save GIF movie "m.gif" Save MPEG movie "m.gif"	

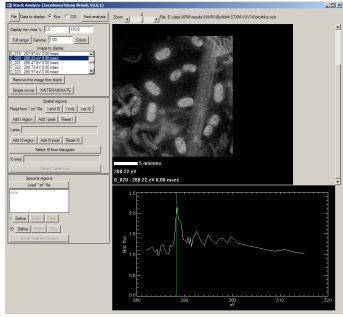

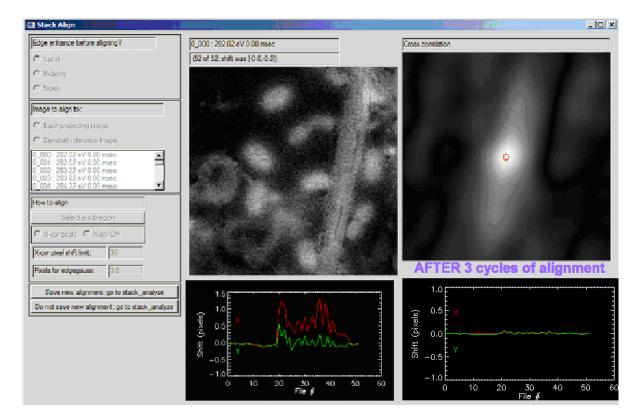

- XRF stack-of-stacks allows extraction of one multi-incident-photon-energy stack from an array of XRF stacks recorded at a set of incident photon energies. (Ultimately to be evolved into a true 4D viewer and processor widget – *anyone want to help*?)
- Zimba Carl Zimba's version of the stack analyze code. It has a very nice alignment which is able to align stacks for which the Jacobsen alignment routine fails. For unknown reasons, when called from aXis2000 the Zimba routines often lock up if complex combinations of commands are used. In such cases the full functionality of the Zimba routines ca be accessed by running *zstack.pro* outside of aXis2000 (if you have an IDL license) in which case you can access all the many features for display and storage, including saving a movie of a stack with display of the spectra from multiple regions.

Some features of the Zimba stack analyze package:

- Reliable alignment (which differs from the routine in Jacobsen's stack analyze).
- Many different formats for Io data are supported (*.csv, *.txt, *.xas)
- Simultaneous display of original and aligned data
- Excellent manual alignment (ztune)
- Multiple spectral regions defined
- Provision to write full, aligned stack to a single file (*.ncb, *.stk)
- Provision to write image sequences as MPEGs, or a set of image file

STACKS Analyze ~Zimba (continued)

Note: The Zimba *.sl and *.aln file formats differ from those written by the *Jacobsen stack analyse*. It is not generally possible to 'mix-and-match' the two sets without using a text editor for conversion. In particular, it is essential to delete all letter and non-numerical symbols from the lines listing the shifts in the *.aln file written by Zimba, before using it in the read-in procedure for stack analyze. The ZSTACK codes can be run independently from AXIS.

Please see separate documentation for ZSTACK supplied by Carl Zimba included at the end of this manual.

Add – add two stacks (useful to take differences to remove dominant contributions to better display minority signals by using negative weighting)

Append – combined 2 stacks (must have the same pixel dimensions !) and order the images according to the photon energy (or equivalent variable)

- **bin** bins (2-2x2 to1 pixel, 3 = 3,3 to 1 pixel, etc) image data for better statistics. The first character of the original file name is converted to a b to indicate the processing.
 - energy bin the data along the energy axis
 - NSLS 1 bin 1 user-selected *.nc file
 - file bin all files listed in the supplied file (typically *.sl files).
 - stack *.ncb bin all images in a stack
 lox bin all images in a Lox stack (PEEM from CLS)

change mesh or size - adjust pixilation or the real-space dimensions

convert to OD with line Io – generate OD version of a transmission stack for the case where there is a set of columns all in the Io region, which can then be used to generate an Io on a line-by-line basis (normally a single Io value for each stack image is used in normalization). This routine is useful if the stack images are acquired so slowly that there is significant change in e.g. the ring current during acquisition of each image.

Analyze	>
Add	
Append	
bin	>
change mesh or size	
convert to OD with line lo	
convert format	>
Differentiate	
Expand	
Fix rollover	>
Generate_stack	
y_illumination correct	
lmage alignment	>
maps	>
RGB - color composite map	
Ratio to another stack	
Rotate	
Slicer (3d viewer)	
Stack_movie	
Statistical analysis	>
Tomography	>



*.ncb

lox

<u>STACKS</u> (continued)

convert format

For most conversions, the user selects the first file then the last file in a sequence; intervening files are converted assuming a standard file name convention (e...g last 3 positions before '.' are an index number).


- OD to transmission – convert to transmission using "white" Io (1)

- ALS to netCDF converts (old) ALS images to NSLS <u>netCDF</u> files, with E-scale shifts and optional binning (adds squares of 2x2 or 3x3 etc pixels). Generates *.*sl* file for input to Stack analyze
 - 1 converts one file selected by pickfile
 - **many** converts many files selected by (first, last) pickfile routine
 - **file** converts files listed in the user-defined file (e.g. *.lst from ALS)
- to axis binary from
 - bmp
 - jpg
 - mrc (format used for tomography in, e.g. IMOD
 - NSLS STXMIV
 - **TOF-all** (time-of-flight PEPICO)
- from axis binary to
 - mrc
 - mpg

- netCDF to ALS - converts NSLS netCDF format files to ALS format files

- 1 converts one file selected by pickfile
- file converts files listed in the user-defined file (e.g. *.lst from ALS)

OD to transmission	
ALS to netCDF	×
to axis binary from	×
from axis binary to	•
netCDF to ALS	۲
PEEM	
PEEM-old	۲
NSLS-STXMIV to netCDF	
NSLS to GIF	
NSLS to HDF	۲
XRF ((*.dta) to 1-column (*.cts)	




cts (ascii spectra)	
mpg	
mrc	



<u>STACKS~convert format</u> (continued)

PEEM - converts PEEM stacks written by various instruments (Lox, Sphinx, AALS-PEEM2, ALS-PEEM3, ALS-pre-Sep02 (peem2 old format), Other)

Recommended for ALL types of PEEM data

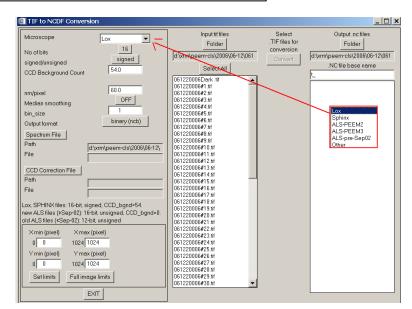

The output is either a binary stack (*.ncb) (read with *stack_process*), or as a set of {*.nc} images (read in with *Stacks~Analyze~stack list* input (or Zimba).The default conditions for SPHINX, ALS-PEEM2 [new (>Sep-02) & old (<Sep-02)], ALS PEEM3 and Lox are indicated in the left centre of the widget.

The upper left part of the widget sets the conversion parameters

```
nm/pixel – sets spatial scale
    No of bits – 12 or 16 bit
    Signed/unsigned
    Median smoothing – Yes/ No
    Bin - reduce size and improve statistics by 2x^2 \Rightarrow 1; 3x^3 \Rightarrow 1 etc
    Lox - Yes / No
    Output format {*.nc} set with *.sl stack list, or *.ncb file
    CCD Background count – signal in absence of X-rays
Input files Folder – select folder with data to convert to stack (lists *.tif files)
           Select all – highlights all files (alternatively select those
                                                                               Conversion Area Selector
you wish to convert
   Select CCD Background file – for patterned dark signals
                                                                                X position
193
   Select spectrum file – get energies of stack from spectrum
                                                                                Y positio
                          generated during stack acquisition
                                                                                BaxXwi
121
                                                                                Bax Y wi
   Get Limits – identify pixel range to convert
                                                                                X min
   Convert – this button will only become active after an energy
                                                                                Y min
63
   spectrum is identified and the files to be converted have been
                                                                               X max
206
   selected. After pushing this button the files are converted to *.nc
                                                                               Y max
187
   files, either temporary, or permanent. If Output format is set to
   *.ncb, only the binary stack is written to disk.
```



<u>STACKS~Convert format</u> (continued)

PEEM-old (ignore unless desperate!) - ALS-PEEM

to *.ncb – convert to

binary stack file, without writing individual netCDF files

to netCDF – convert to set of *.nc (netCDF) files and a stack list (.sl) file This activates the ALS PEEM read-in widget (see Read~images~ALS PEEM) and the user selects the first and last files, all conversion options, then executes the conversion. Note: this widget does not work in the IDL VM version

PEEM-old

NSLS-STXMIV to netCDF

- SPHINX - convert 16-bit TIF files from SPHINX LabView pro to *.ncb – convert to binary stack file, without writing indiv to netCDF - convert to set of *.nc (netCDF) files and a sta This activates the ALS PEEM read-in widget (see Read~ima selects the first and last files, all conversion options, then executes the conversion. Note: this widget does not work in the IDL VM version

NSLS STXMIV to *.ncb – converts nsls STXMIV image sequence directly to a binary stack file (all images in one file). NB One can use Zimba or Jacobsen align procedures on *.ncb files.

NSLS-STXMIV to netCDF - convert NSLS stxmIV format files to netCDF format files

NSLS to GIF - converts one *.nc file to a GIF image

NSLS to HDF - converts *.nc files to HDF format data files 1 converts one file selected by pickfile many - converts a sequence of files with first, last identified by pickfile

XRF ((*.dta) to 1-column (*.cts))

Converts XRF spectra from Oxford system to readable values

Differentiate – compute the derivative of the spectra at each pixel in a stack

Expand - add additional pixels on left/right and top/bottom to a selected stack.

Fix rollover

- as for Images, but applied to all images of a stack. for some image files (e.g. ALS PEEM) it is possible to have signed or unsigned formats which

leads to 'roll-over' for pixels with above 16 K counts (e.g. if an unsigned integer data set is read using a signed integer). This replaces all pixels with

a -ve value with 65,535 plus that value. Similarly, in phase outputs from ptychography reconstructions, many reconstruction programs automatically 'fold back' phase values such they lie between $-\pi$ and $+\pi$. NB the phase roll-over code only partially works.

ALS-PEEN

SPHINX

to *.ncb

to netCDF

OD to transmission	
ALS to netCDF	۲
to axis binary from	₽
from axis binary to	۲
netCDF to ALS	۲
PEEM	
PEEM-old	۲
NSLS-STXMIV to netCDF	
NSLS to GIF	
NSLS to HDF	Þ
XRF ((*.dta) to 1-column (*.cts)	
	-

stack stack list

<u>STACKS</u> (continued)

- **Generate_stack** a stack is computed and saved from an image and a spectrum, with the image and spectrum selected by the user from aXis2000 buffers.
- Y_illumination correct ratio the first selected stack by a second stack (which is the illumination, which can be generated by heavy smoothing all the images in the first stack
- **Image alignment** tools to manually align a series of sequential files (either ALS or NSLS format; read in after defining first and last of the sequence). *Note this always works whereas the manual align in ZSTACK is somewhat 'tempermental'*. There is a nice manual alignment tool on *Stacks~Analyze~Jacobsen stack analyse*

shift - 1-point calibration of image (x,y-scale).

stretch/ shift - 2-point calibration of image (x,y-scale)

Analyze Add Append bin change mesh or size convert to OD with line lo convert format Differentiate Expand Fix rollover Generate stack y illumination correct Image alignment maps RGB - color composite map Ratio to another stack Rotate Slicer (3d viewer) Stack movie Statistical analysis > Tomography

After shifting or stretch/ shifthing the (x,y) scales for image alignment, this routine then:

- 1. grids to a user-defined pixel size (should be similar or smaller than the recorded pixel size to avoid loss of information)
- 2. truncates to a fixed user-defined [xmin, ymin, xmax, ymax].
- 3. bins to a user defined factor (1=no binning) to trade off S:N versus spatial resolution
- 4. writes a netCDF file. The names are FORCED to be the same as the input but with the 1st letter of the original filename converted to **s** (shift) or **a** (shift/stretch).
- 5. generates *.sl file of filenames (read using Stacks~Analyze~stack list input). In addition it stores 2 (s) or 4 (a) files (in buffers 5,6 and 8,9) which are the shifts in real-space units (microns) The parameters defined in the first pass are saved and applied automatically to all subsequent files. The X,Y shifts and stretch terms for each file are accumulated in buffers 7 (stretch) 5,6 (point 1,x,y) and 8,9 (point 2,x,y) for later use to explore how the microscope or the sample is changing.

Notes for image_alignment:

- Clear buffers 5-9 (using the Clear Buffer above the thumbnails) before starting as they are used for results

- Check the extreme limits of a stack sequence to ensure the [xmin, ymin, xmax, ymax] values used to define the common part of all images are valid for all files.

Warp – Image alignment using a polynomial 2-d transformation to align successive images to the 4 or more fiducial points identified on the first image, and on each subsequent image. This can be useful when the sample distorts during a measurement due to radiation damage.

maps

SVD - convert an image sequence (stack) to <u>component maps</u> using singular value decomposition (SVD) procedures. When accessed from this menu item, the input must be an AXIS format binary file stack (*.ncb). SVD Stack fit CGO curve fit polarization fit

Typically the input stack consists of a set of images prepared on an optical density (OD) scale <u>with careful alignment</u>. The reference intensities at each energy of the stack are extracted from user identified reference spectra (*.txt, read from disk), which are interpolated / extrapolated as needed to match the stack energies. The user is prompted to either read the list of reference spectra from a *.par parameter file, or, after identifying number and filenames of the individual reference spectra, write the list to a *.par file. This is helpful in cases where the same set of reference spectra might be applied to a number of stacks.

The **output** is a set of **chemical component maps**, automatically written to files with names constructed from a root and the component names (it is wise to keep the component names SHORT to avoid excessively long file names). In addition the **residual** signals averaged over all energies is saved as an 'image'. Comparison of the magnitude and spatial distribution of the residual signal is a useful way to evaluate the validity of the analysis. Optionally a **stack of the residual images** (difference of data and fit at each energy) can be saved for later examination. If the input stack is in OD units, and the reference files are on absolute linear absorption scales (**OD1**, or optical density per nm thickness at the standard density of each component), the Z-values of the resulting component maps are in <u>absolute thickness</u> units (in nm, assuming the reference spectra are in units of nm⁻¹).

NB the SVD code can also be run from the IDL command line and has different features not implemented directly in aXis2000. See the code file for further details.

Stack fit – Performs a linear regression analysis (linear least squares fit) of the spectrum at each pixel to a sum of (1 to 8) user-defined model spectra and a constant.

NOTE: Relative to SVD maps, stack fit adds an additional component to the analysis, a CONSTANT' which is flat spectrally (same at all energies) but different at each pixel. This always leads to a better fit statistically (smaller residual, often by 2 orders of magnitude) may lead to systematic error in the result. Stack-fit rather than SVD should be used where there are offsets of reference spectra relative to the data, due to Io errors,

CGO curve fit - This uses a conjugate gradient optimization method (from Numerical recipes) to perform spectrum-by-spectrum curve fits to reference spectra. The user dialog is similar to those used in the SVD and stack fit routines. The fit of a single spectrum can be carried out using this method with the *spectra~curve fit* command.


In tests on low noise data sets with valid OD scales and with accurate spectral models, essentially identical component maps are generated by SVD maps, stack fit and CGO curve fit

STACKS~maps (continued)

EXAMPLE of using *stacks~maps~SF* to convert a C 1s stack to a set of component maps.

Data: wet biofilm (courtesy John Lawrence, National Water Research Institute, Saskatoon)

Reference spectra are quantitative (OD1) so z-scales on the **protein**, **polysaccharide** and **lipid** maps are nm thickness. **constant** represents signals from water, a silicate diatom, and CaCO3 and K at the envelope of the cells. The color coded composite (buffer 7) combines the **protein**, **constant** and **lipid** component maps. The image area is 25 μ m x 25 μ m. (Lawrence et al, Applied Environmental Microbiology <u>69</u> (**2003**) 5543)

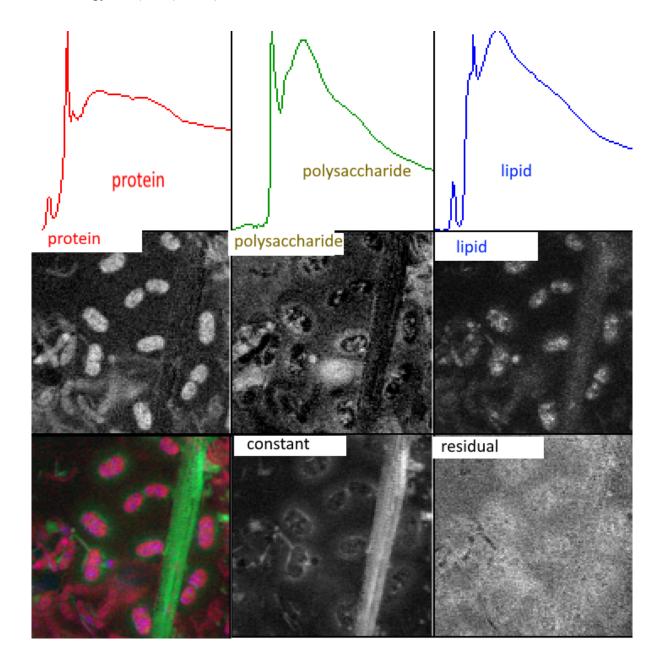

STACKS~maps (continued)

For **SVD**, **Stack fit** and **CGO-fit** analyses with less than 5 reference species, at completion the aXis2000 buffers contain:

Buffers **1-3(5)** – the reference spectra

Buffers 4-6(8) – the component images - i.e. the spatial distribution of the component Buffer 7 – the map of the linear term (for **Stack-fit** only)

Buffer 9 – the map of the chi square values of the fit at each pixel (~ fractional uncertainty)

If there are more than 4 components, the spectra are displayed, but then the component maps are displayed in sequence, starting in buffer #1/

For analyses with more than 5 reference species, the component maps are stored in the same buffer number (1-8) as the reference spectra and buffer 9 contains the residuals map.

After making the component maps it is often useful to explore the spatial correlations of components by combining any 3 of the component maps into a single **color-coded composition map**, by using the *Display~RGB composite* command or (if you are running a IDL licensed version) *stacks~RGB color composite map*

HINT: If you want to create a 1-color or 2-color composite, select a buffer that is empty or one that contains a spectrum for the colors you do not wish to include.

How to evaluate the significance of maps derived using SVD, Stack fit or CGO fit.

The user of *stacks~maps* must realize that the fitting code will always give a result, but the <u>result may not be valid</u>. <u>It is ESSENTIAL to evaluate the quality of the fit</u>. aXis2000 provides a number of tools to do this.

* Examination of the **residual stack** can help to evaluate the validity of the fit. Spectra extracted from various regions of the residual stack should be only noise; if there is a missing chemical component one can sometimes obtain its spectrum in the poor fit regions of the residuals stack.

* One can apply *images~generate_mask* on the **residual map** (in buffer #9) to write out a region_of_interest (ROI) file corresponding to the poor fit regions. The ROI files can be used in *stack_process* to extract the spectrum of the poor fit region, which may be a 'missing component'.

* One can apply *images~generate_mask* on the component maps to generate the ROI of the pixels with large amounts of components of interest. After extracting the spectrum of those pixels using the ROI files in *stack_process* the **quality of the spectral fit** can be examined by applying *spectra~curve fit~{linear regression (=stack fit), or CGO(=SVD)}*

* An alternate method, such as a multivariate statistical analysis (MSA) approach- e.g. PCA_GUI (*stacks~statistical analysis~PCA_GUI (CJJ Dec 2005*) or **Mantis** (https://spectromicroscopy.com/) can be explored, If the results of the forward fitting approach (maps~SVD or stackfit) and MSA methods are similar, greater confidence can be placed in

STACKS~maps (continued)

Polarization fit


Fits a sequence of images where the control variable is the angle between the E-vector and the image. Such data can be generated by azimuthal angle scanning (e.g. at STXM532), or by rotating the E-vector with an EPU (at STM1102 and CLS-STXM). The polarization signal is fit to

$$I(\theta) = C + A * \cos^2(\theta - B)$$

where C is a non-angle dependent constant, A is the amplitude of the dichroic signal and B is the 'director' (angle of maximum intensity)

Note that the quality of the fit can ve evaluated by selecting a region of interest, extracting the angle-dependent signal then using *spectra~curve fit~pol fit*

RGB Color composite map – uses a widget with lower / upper limit controls and selector of any of the aXis2000 buffers to visualize spatial arrangements of chemical components (e.g. as derived from curve fitting (stacks~maps) or multivariate statistical analyses (or simply, images at 3 different energies)

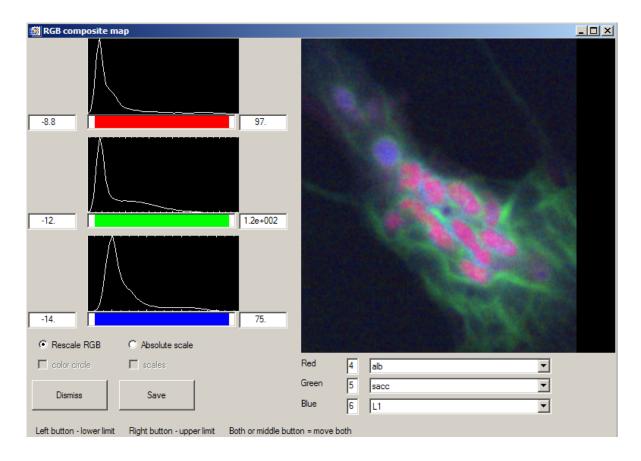

Note: The **RGB Color composite map** does not function properly when executed from the virtual machine (VM) version (tested Jan 2023, on IDL6.3 and IDL8.6). Use *Display~RGB composite*.

STACKS (continued)

Ratio to another stack – divide the stack by a user selected stack (*.ncb) (NB stacks can be generated from an image and spectrum using *stacks~Generate stack*)

- **Rotate** rotate the whole stack by user selected angle. Boundaries are filled with the minimum over each image
- Slicer (3d viewer) IDL's 3d viewer with read in of a binary stack
- Stack_movie calls Jacobsen stack_movie routine. Files defined by user-selectable stack list file (*.sl).

If 'cancel' is selected, the *stack_build_list* routine is initiated.

Statistical analysis


- **Principle components** - applies the IDL principle component analysis package (PCOMP.SAV) to derive the **eigenspectra** (power weighted representation of the

data) from a set of OD images (binary stack in an *.ncb file). The routine implemented in aXis2000 provides the **eigenvalues** (fractional contribution of each eigenspectrum) and eigenspectra of

principle components PCA_GUI (CJJ Dec 2005)

the first 8 components. This is useful to obtain a sense of how many independent chemical species might be present in a give data set. The **eigenimages** are readily generated by using the eigenspectra as model spectra in a SVD map

- PCA_GUI (CJJ Dec 2005) – combination of principle component, cluster and target analysis allows for unsupervised analysis to extract a set of potential NEXAFS spectra, with extensive capabilities to evaluate and optimize. See the manual for this package for further details.

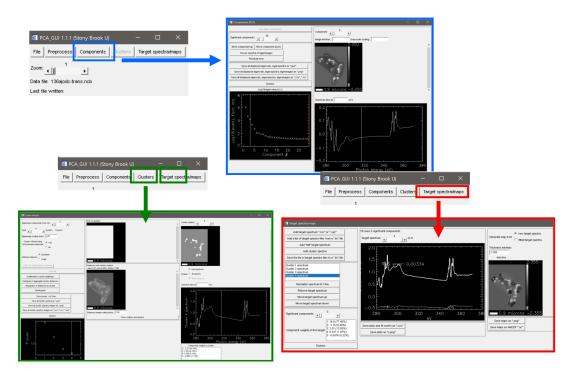

Stacks (continued)

Tomography Routines to analyse 4d (x,y, E, θ) data.

Make tomo list – write a list of the folders containing tomo data.

This can then be edited to include the angles at which each stack was measured.

Angle stack from SDF files

reads a set of angle varying images to generate an (**x**,**y**, θ) stack **one image** – select one image from a set of images (stack) at each angle **map** – select a map from each folder **stack** - read full 4-d (**x**,**y**, E, θ) data and convert to a format suitable for read in to IMOD.

make tomo list angle stack from SDF files angle stack from images (axb)

Þ

linear

curve

LINESCANS (processing of linescan spectra)

Processing of <u>linescan spectra</u>. Linescan processing methods are also useful for a variety of image analysis tasks such as:

- obtain averaged **profiles** from an image along X or Y
- remove low frequency noise from images (average all horizontal, or all vertical, then ratio)

HINT: If the direction of interest in the image is not oriented along vertical or horizontal, use *Image~rotate* to rotate the direction of interest to horizontal or vertical

Add lines - sums all lines selected with cursor (lower / upper limits)

- Horizontal (for Linescans, sum spectra over a range of length along the line)
- Vertical (for Linescans, sum line profiles over a range of E)

align - 'tilts' data to user specified line

- Linear straight line defined by 2 points
- Curve curved line defined by multiple straight line sections

line_fit – apply SVD-based curve fit to a linescan (same method as in *stacks~maps~stack-fit*). This is an excellent method to analyze and visualize chemical composition along a line. Quantitative thickness along the line can be generated if quantitative reference spectra (OD1) are used.

locate line – draws the (x,y) position of a linescan on the image currently displayed using information from the parameter file for the linescan (Jan2023: only set up for SDF format data written by STXM_control). Be sure to load and display the image on which the linescan was defined (or at least one which includes the spatial region of the linescan).

normalize to Io – divides each **horizontal** line by user-selected buffer containing the Io, then computes –log(Image/Io). Get Io from *Add lines~Horizontal* if there is an open region in the linescan or from a separately recorded point or line spectral scan.

normalize to line

Horizontal - divides each horizontal line by content of user-selected bufferVertical - divides each vertical line by content of user-selected buffer

horizontal vertical

Hint: To remove line-by-line periodic scan noise, generate a 1-d profile of periodic noise by *Add lines~vertical* (or *Add lines~horizontal*, as appropriate) over all or part of an image then subtract that profile from the image using *Normalize to line*.

subtract reference computes (Image – ref), The reference 1-d profile signal is taken from user selected buffer (this routine does the same thing as *normalize to line ~horizontal*)

Lines	scans	Spectra	Display	l
	Add li	nes		>
	align			
	line_fit	t		
	locate	line		
	norma	alize to lo		
	norma	alize to line		>
	subtra	ct referend	:e	

return to top menu

Absolute value

Add

Bin

Calibrate Convert to

SPECTRA

Procedures for processing 1-d data (y as a function of x). This is often spectra, but can also be intensity profiles along a line, Io signals, etc

Absolute value – computes absolute value

Absolute value – computes absolute value	Curve fit
AddAppend- append 2 data sets - all data points in overlapping region are keptBuffer- generate SUM of 2 spectra (interpolation used) - add (or subtract) constant to y-axis	Delete Differentiate Fix rollover Gain E_to_Wavelength Integrate
 Calibrate (for each of X and Y axes): Auto - uses last axis recalibration parameters 1 point - shift values by user defined amount from cursor selected point (shift) 2 point - shift vales based on 2 points (shift & stretch) Numerical 1- or 2-point with numerical input 	Linear Background Modify one point Multiply Peak area Power Ratio_to Reverse values
Convert_to	Split Truncate

- **OD** automatically generate OD spectrum from a transmission spectrum by identifying a second buffer with Io
- **OD1** converts to intensity for 1 nm of material (needs XX-sf.od1)
- **IP** converts E-scale from kinetic energy to binding energy with user supplied photon energy. $IP = E_{photon} - E_{kinetic}$

OD OD1 IP

Curve fit


linear regression – use IDL regress function to fit the spectrum in the current buffer to a set of

reference spectra. The reference spectra can be identified using a *.par parameter file (identical to that used in *stacks~map* and *linscan~fit*)

CGO fit - use conjugate gradient optimization method (CGO) to fit the spectrum currently displayed in a buffer to a set of reference spectra which the user is prompted to select from the disk. This is a useful method to check and display the fits that are obtained from image stacks. The fit components are listed on the IDL log as well as in the aXis2000 log display.

Pol fit – fit an angular dependent signal to

 $I(\theta) = C + A * \cos^2(\theta - B)$



Spectra (continued)

Delete - delete all data between 2 cursor-identified positions

Differentiate – take derivative of displayed signal (simple $\Delta Y/\Delta X$ only)

Fix rollover – identifies data with modulo 2¹⁶-1 range, and adds units of to successive rolled over portions of the spectra

Gain - multiply – multiply y-axis values by a factor - divide – divide y-axis values by a factor

E_to_wavelength - X-axis transformed by 12398/X (both way conversion)

Integrate – determine integral of displayed signal

Linear background - subtract user defined line

Modify one point – left click – add a point, right click – delete the point

Multiply – multiply the spectrum in the current buffer with that from a used selected buffer.

Peak area – determine area under curve between user-selected limits

Power

- $exp(Z)$ – exponential of z
- ln(Z) - natural log of z-values
(use to convert Transmittance to Absorbance)
- $10^{(Z)}$ – raise z-values to 10
- log10(Z) - base-10 log of z-values

Ratio_to - takes ratio of 2 buffers (interpolated to same x-axis scale)

Reverse values – reverses the (x) values in a spectrum.

Split – separates a multi-valued spectrum into single-valued regions, placed in successive buffers. Data of this type can be generated by acquiring multiple regions which are not in strict increasing-energy order. This can be useful as a means to track radiation damage. Recording the most chemical sensitive part of a NEXAFS spectrum at the beginning and end of a point spectrum is an effective way of having an internal check on radiation damage. *Hint:* AXIS auto-detects multi-section spectra recorded with overlapping multiple regions and plots all components in the same buffer. The separate single-valued sections are placed in sequential buffers by this command.

Truncate - truncate spectrum to data between 2 cursor-identified positions

exp(Z)
ln(Z)
10^(Z)
log10(Z)

return to top menu

.

Over Diet

DISPLAY

	Over Plot	
Over Plot - display multiple spectra	Clear	•
No Rescale - select multiple buffers (0-9)	3d plot	
Y-axis of data is preserved	Modify image colors	
Rescale – select multiple buffers (0-9)	Modify rigid colors	
each spectrum is rescaled to full screen	Pixels only	
Window - add a single buffer, with data rescaled within y-limits	RGB composite	
selected by the user using the cursor	Scale bar position Show color scheme	
Shift - add a single buffe \rightarrow bottom y-position selected by cursor;	Thumbnails	
no rescale (ie y-scale is set by previous data)	mambhais	
All modes of Display-Over Plot can be combined in any order. All previous Display-Over Plot		

All modes of *Display~Over Plot* can be combined in any order. All previous *Display~Over Plot* processing is preserved in the main plot window until a single buffer is selected for plotting, by left-clicking on: thumbnail plot, buffer label, or indicator box.

Clear Lines – removes cursor-related lines from Main Image Current – erases only the currently selected buffer Selected - any of 0-9 buffers can be erased (also as second row button) All - resets all buffers to zero (like starting a new version of aXis2000) NB the Clear Buffer single line command accesses the last 2 commands

Hint: If the colors go 'crazy', restore the default color scheme by **Clear Buffer** or *Display*~*Clear*. This often occurs on the first use of *stacks*~*analyze*~*zimba* – a black display is generated when displaying the first selected spectrum. Use the **Clear Buffer** command above the thumbnails to reset the color scale, and then erase and re-select the regions in *stacks*~*analyze*~*zimba*

3d-plot - generate 3a -d shade surface plot from an image with x,y,z axes.

- **Modify image colors** pop-up widget (XLOADCT) that selects color scheme and adjusts (top, bottom, gamma) variables. *In Win systems, if 256 colors is set, this updates all graphic windows dynamically. If color is set to higher value (16-bit, 24-bit, or true color) one needs to redisplay a graph to change the color scaling. Since each thumbnail sketch (upper left of screen) is displayed independently, the color scale of the thumbnail sketches will only change after they are selected.*
- **Modify rigid colors** select custom colors for buffer specific spectral colors, background, foreground, etc
- Pixels only plot using 1 display pixel per pixel of data

RGB composite – takes images in 3 buffers and assigns then to red, green and blue color components of a single image. It is necessary that all images are the same size and are of the same physical region. The composite image can be saved to disk in a 3-component TIF format which reads into Paint Shop and Powerpoint. The individual R, B, G components can be read back using the *Read~Images~Other~TIF~data* command. User is given option to use a common scale for all

three images (thus preserving information about relative intensities of components), or autoscaling each image independently, which will give equal visibility to each component.

Display / continued

Scale bar position – use cursor to define the left end of the scale bar.

Show color scheme - display current colors assigned. Note that the bottom 16 colors in the 256-color table are assigned to 'hard' colors to allow ready differentiation of different buffers.

Thumbnails – display multiple buffers on main window

- 4 user selects any 4 buffers
 - **common scale** plot using identical scale for all images (in B/W for printing)
 - **rescale each** plot with each image byte scaled to its data values (in color)
- 9 display all 9 buffers

common scale - plot in B/W (for printing) -

rescale each – plot with each image byte scaled to its data values (in color)

UTILITIES

9 pad analysis automated analysis of 9-pad radiation damage patterns. Templates for 10 areas are adapted to the spatial scale of an experimental 9-pad image, multiplied and integrated to generate the signal as a function of dose.

Calculate concentration computes equivalent concentration in aqueous solution (in Molarity). Use with *utilities~calculate X*rav absorption parameters (SF) to ESTIMATE visibility of spectral features in aqueous solution, and estimate the solution concentration and water thickness to guide sample preparation. [see: Axis2000-manual-calc conc.ppt 04-Jun-18]


Calculate peptide spectra – launches a widget to generate

the NEXAFS spectrum of a user specified amino acid sequence from the C, N, O spectra of the constituent amino acids. Note, the AA sequence can be taken from the protein data bank (PDB) or generated from standard codes for the amino acids.

Over Plot	⊁
Clear	۲
3d plot	
Modify image colors	
Modify rigid colors	
Pixels only	
RGB composite	
Scale bar position	
Show color scheme	
Thumbnails	۲

return to top menu

9_pad analysis	
Calculate concentration	
Calculate peptide spectra	
Calculate X-ray parameters (SF)	
Execute macro	
Other	>
Print	>



Utilities (continued)

Calculate X-ray parameters (SF) - Determine the **mass absorption** or **transmission** for user defined elemental compositions. The mass absorption elemental signal for a given chemical formula and density provides normalization for reference spectra to the quantitative OD1 (optical density response for 1 nm thickness) which can be used in the SVD map and stack_fit routines to obtain quantitative thickness maps. In addition, the transmission for a user-defined composition, density and thickness can be useful to evaluate feasibility of a sample. NB The *sf.pro* program (in the AXIS directory) is a full implementation of the old CXRO SF program for X-ray constants, which corrected some errors. Routine written by Billy Loo, 1996. The elemental X-ray mass absorption coefficients are from 1996. There my have been updates since then. See https://henke.lbl.gov/optical_constants/ for latest values.

Execute macro – execute a file of standard aXis2000 commands (with parameters) So far only a few of the axis commands are set up to be used in this way.

ECHEM plot ISEELS Display print ISEELS Database Print SysVar

Other - commands not directly related to spectromicroscopy

ECHEM plot - generate composites of images and

electrochemical results (e.g. cyclic voltammogram) to make a movie of in situ electrochemical results

ISEELS Display – too to plot spectra from an inner shell electron energy loss spectrometer.

print ISEELS Database – print all selected ISEELS spectra from the gas phase core excitation data base (<u>http://unicorn.mcmaster.ca/corex/cedb-title.html</u>)

Print Sysvar - display on the IDL log window (so, need licensed IDL) the current values of all IDL graphics parameters (used in code development).

Logbook Annotated

Print

Logbook (default: 3" x 3") – no annotation **Annotated** (default: 4" x 4") – brings up the IDL annotate widget.

Hint: (1) A fast alternative to printing is to use a screen capture program such as *MWSnap* <u>http:/</u><u>www.mirekw.com/</u> to copy the screen area you want to the clipboard, then use an image processing program such as <u>Paint.net</u> to further modify (e.g. annotate). The modified screen captured image can then be transferred into a presentation program, such as powerpoint or keynote.

Hint: (2) Use The PRINTER option in *axis_xxxx.ini* (xxxx = win, unix, macos) to set up your default system printer

Utilities (continued)

Set preferences – allows user to modify the default parameters which are contained in a file called **axis.ini**. This uses a widget (*see fig*) to let the user define a large number of different parameters. The modified initialization file is written at the end of each normal exit to aXis2000 so that it starts in the same configuration (default directories etc) as in the last use.

On start-up, if AXIS cannot find the default initialization file (**axis.ini** in the subdirectory where the <u>AXIS code files are located</u>), it starts this widget.

NB in the post 2023 versions of aXis2000 this has been removed as it does not work right.

Second row of single command buttons

Above the Main graphical window

Exit Quit XimageViewer Nexus File Viewer Help

Exit write <u>axis.ini file</u> with parameters then return to main IDL command window. It is a good idea to use Exit rather than Quit, since Exit saves the last path used, which can save time navigating to a folder you were processing, the next time you launch aXis2000.

QUIT return to main IDL command window, without saving current parameters

NOTES:

If you have a net connection, and you have the command to start your browser identified correctly in the **axis.ini** file, then you can click on the indicated synchrotron sites or the aXis2000 label to connect to the X-ray microscopy facility. Clicking the label at the bottom of the splash screen takes you to the <u>aXis2000 web site</u>

Additionally, for those using a licensed version of IDL.


1. From the Command Window of IDL type axis2000 to (re-)start AXIS.

2. If you wish to display the **rotating AXIS logo**, restart AXIS by typing **axis2000**, /spin at the IDL prompt.

XimageViewer

Launch a viewer of image files. In addition to standard image files (jpg, bmp, gif, tif, png, etc) this displays ALS_STXM (SDF) format file (*.hdf,*.xim) pairs in the selected folder. This is useful when you do not have detailed information on data files.

This DLL was provided by Ivo Koprinarov.

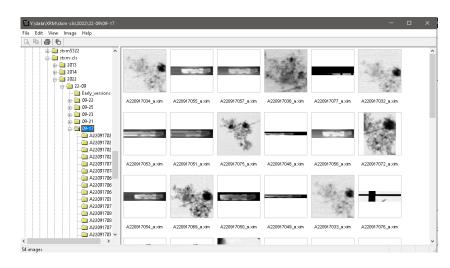

Nexus File Viewer

Launch a tool to review NeXus format files to allow rapid discard of unwanted files (the STXMs using pixelator acquisition save all files, 30-50% are junk). This is also useful to identify data of interest when the log book notes are insufficient. The data viewed in NEXUS file viewer os the default file name in *read~STXM (NeXus)*

NEXUS file viewer	-
	Folder Y:\data\XRM\Soleil\2022\22-10\10-06\
) Filename
	Sample_Stack_2022-10-06_039
and the second	Type sample image stack
The second	Energy 939.000
The second	Dwell time (ms) 3.00
all and	24 Discard
and a	Dismiss

Calls Adobe Acrobat reader, using the Unix (Acroread) or Windows command (AcroEx32) to bring up **AXIS.pdf** (a pdf version of the **aXis2000-manual.doc**). Since the location of the Adobe reader depends on the system, the system command that will start the Acrobat reader and display the AXIS.PDF file is part of the AXIS.INI file. These details ares set by the **help_cmd** line in the **set_preferences** dialog, or by using a text editor to edit, axis-win,ini (Windows) or axis-unix.ini (unix, MacOS) file.

Second row of single command buttons (continued)

above the 9-thumbnail display

Reset colors	Copy Buffer	Clear Buffer
--------------	-------------	--------------

Reset colors


Changes Display color scheme to the current default. Often the color scheme is distorted after running one of the **stack~analyze** widgets. Use this button to reset to the default color scheme to that for aXis2000.

COPY buffer

- moves contents of the current buffer to one of the 10 data buffers in AXIS. The destination buffer is selected by clicking on the thumbnail, or by clicking on the label of the buffer to which you wish to move the data. Note the latter is the only way to move data into buffer 0.

Hint: To preserve a processed spectrum or image located in Buffer 0 you must use Copy to transfer it to buffer 1-9 to avoid overwriting the result in the next processing step.

CLEAR buffer pops up the multi-buffer selector widget to let the user select those buffers they wish to clear.



CONTROLS BELOW THE MAIN IMAGE WINDOW

Axes

If selected (**ON**), the X and Y scales are displayer.

If not selected (**OFF**, the default) only the image, X-axis and Y-axis labels are displayed.

Z-lines

- ON (default) - X, Y lineouts generated at every mouse move

- OFF - X, Y lineouts generated only on left mouse click

<u>Note:</u> The operation of *Zoom~pan* is also switched with this button. If ON, the zoomed image updates on every mouse motion. If OFF, the zoomed image updates only after a mouse click on the main image

Symbols

ON - plot symbols on lineouts and spectra (main image window only) **OFF** (default) – no symbols on lineouts or spectra

Note these options allow one to adapt to the speed of the computer. Continuous updating of the lineouts and the zoom/pan, as well as symbol plotting, take large amounts of cpu/graphics resources and can slow aXis2000.

Bar

ON (default) display white scale bar [size is (1,2,5,10 pattern; within 5-10% of image] The position of the scale bar can be defined using *Display~scale bar position* **OFF** – scale bar and value are not displayed

Gamma

use either the slider or the number boxes to change the image gamma (for the aficionados, se <u>https://en.wikipedia.org/wiki/Gamma_correction</u>). Note this control is only active if an image is displayed.

🗌 Axes	🔽 Z-lines	Symbols	🔽 Bar
∋amma 🔳		▶ 1.00	

Copy all code into a directory. (use **WinZip** (or similar) to **expand axis2000.zip using folder names** into your source directory). –

I STRONGLY RECOMMEND using c:\aXis2000\ on Windows systems, and users\aXis2000 on MacOS systems as the main directory / folder.



There should be 4 folders (AAData, java, logo, and sfdata) and over 500 files (mostly *.pro).

To set-up a licensed IDL system so it starts aXis2000 every time:

- 1. Start IDL (I use version 6.3 for Windows and 8.8 for MacOS)
- 2. Set up preferences
 - Path add the directory with aXis2000 files
 - Start-up- working directory: c:\axis2000\ (or whatever your source directory is) - start-up file: axis2000 batch
- 3. Shut down IDL and restart.

To use IDL without automatically starting axis2000, type aXis2000 at the IDL command line.

Several different versions of the <u>INI file</u> are included: **axis_win.ini** (for Microsoft Windows);

axis_macos.ini (for Apple OS), **axis_unix.ini** (for unix OS). Use the one identified for your operating system. If necessary use a text editor to edit the entries for your needs. Typically, this will involve changes to the SIZE parameter (I choose a value that fills about ½ of my graphics screen), the location of your pdf viewer, and the location of your web browser. See below for an example and more details.

Hint1: There are often problems if you try to use a different drive letter, or folder name than c:\aXis2000. A particularly **BAD CHOICE** would be

C:\Documents and Settings\Default User\aXis2000\ since the IDL code in aXis2000 automatically TRUNCATES text strings at the first space. Thus the program would be looking for files (or writing files to) C:\Documents, a folder which does not exist.

Hint2: I may be possible to execute aXis2000 just from the aXis2000.sav, compiled version. However, many parts of aXis2000 would not work properly as it needs information from the distributed source code and the data files in the sub-folder. The aXis2000 initialization file (axis_win.ini, axis_unix.ini, axis_macos.ini

A sample AXIS.INI file (on a WIN system):

```
LINE#
1. c:\aXis2000\
2. WIN
3. PS
4. Y:\Backup\papers-old\X-ray microscopy\CNTs\MWCNT-Najafi\
5. 1.00000
6. 0
7. mac
8. idl.ps
9. Arial*14
10. copy idl.win lpt1:
11.c:\progra~1\acrobat3\reader\acroRd32 c:\axis\axis.pdf
12.C:\Program Files (x86)\Google\Chrome\Application\chrome.exe
 written: Mon Jan 02 14:58:04 2023
(aph 31-Jan-00) Please adapt to your hardware
;
                                      devices currently supported
; Items set
; -----
; -----
1 CodePath
2 Screen display device
3 Print file format
4 Default data directory
5 graphics scale factor
6 default color table
7 location
8 spooler or print file
9 default font for widget
10 Printer command line

(e.g. c:\aXis2000\) - include final separator
(WIN, X)
(PRINTERPCL, PS) ; Printer uses system default
(any - last path will be saved on Exit
(0.5 - 2) (1 = 360x360 pixels for image window)
(any IDL supports) 0 = B/W; 3 = red temperature
(NSLS has special meaning = spooler switch)
(c:\tmp\x1a at nsls - special !!)
9 default font for widget
(command line needed to transfer to printer)
10 Printer command line (command line needed to transfer to printer)
                                           NOT used if PRINTER is set on line 2
11 Command to view Help pdf (get acrobat reader free from www.adobe.com)
12 command to run browser (WIN: must be executable from MS-DOS window)
```

A. For WINDOWS machines

Color schemes greater than 256 work fine. In most cases, data is redisplayed, but occasionally you need to refresh a display to get a new color table to be implemented (With color tables above 256 - 16-bit, 32-bit or true color) IDL does not automatically update the display). *Reset colors* does this.

B. For Unix (X-windows) based systems

Since Unix is case sensitive, it is important that the case of the names of files be preserved. All the AXIS file names are strictly LOWER CASE. Some FTP programs force the file names to upper case which is a problem. If you have error messages saying a given pro file cannot be found please check the case of the filename and rename it to exactly what the IDL error reports.

Use ASCII transfer for all files (except *axis.bmp*, *axis.doc*, *axis.pdf* associated with the stack codes, which must be transferred in binary mode) when transferring code from Windows to UNIX or Macintosh systems to avoid problems with the differences in end-of-line coding in the 3 systems.

- the UNIX version of IDL only likes @bsif_com or @axis_com in the AXIS.PRO file. On the Linux-PC version the batch processing would not work when long names such as axis_common.pro are used for include files. Some examples of the COMMON include files are:

axis_com.pro ax_peem_com.pro bsif_com.pro img_com.pro in total, there are 39 common files in aXis2000 (as of Jan 2023)

Run time hints:

If you quit AXIS but stay in IDL, restart AXIS by executing axis2000 at the IDL command line.

IDL Virtual machine version

This allows you to run aXis2000 without purchasing an IDL license :

 download IDL from the download website, which, as of January 20203 is: <u>https://www.l3harrisgeospatial.com/Software-Technology/IDL</u> (NB you need to register in order to access the download the code (version 8.6 is ~2 Gb)

- 2. Download the aXis2000.zip package from <u>unicorn.mcmaster.ca\aXis2000.html</u>
- **3.** Extract (unzip) all contents into c:\aXis2000 (Windows) or /Users/aXis2000 (Mac OS X) (Make sure 'Use folder names' is turned on when you unzip)

4. set up a **desktop icon** for convenience. If it is your first time setting up aXis2000, you need to associate the aXis2000.sav file with the IDL runtime engine which on windows is (IDL6.3) C:\RSI\IDL63\bin\bin.x86\idltrt.exe

(IDL8.6) C:\Program Files\Harris\IDL86\bin\bin.x86_64\idltrt.exe (for 64-bit computers) or C:\Program Files\Harris\IDL86\bin\bin.x86\idltrt.exe (for 32-bit computers)
 Once the association of *.sav files with IDLRT is made the desktop icon can be created by (Windows) right click on the desktop; click New~shortcut; browse to, then click on C:\aXis2000\aXis2000.sav; click Next; define name of shortcup.

5. If you have other *.sav files you do NOT want to associate with IDLRT, you can define the desktop item as outlined at <u>http://unicorn.mcmaster.ca/axis/aXis2000-IDLVM.html</u>

Hints:

You must have all the source code files in the folder to make the Virtual Machine version work properly

Note: If you use a folder other than c:\aXis2000 or /Users/aXis2000 there may be problems running the code.

Do NOT use folder (directory) names with blanks in the folder or file names for the source code or your data !!!

A common problem is to put aXis2000 in 'My Documents' or in 'Program Files' Note that both of those folder names contain a blank. You are warned. Please provide feedback by email on how you would like to see this program evolve to be more useful to the X-ray and non X-ray SpectroMicroscopy community.

If you report a bug, I will try to fix it as soon as possible. It is most useful if you can send data file(s) which exhibit the bug, and, if you are running a full version of IDL, the IDL log window error report.

Adam P. Hitchcock

Emeritus Professor of Chemistry & Chemical Biology
Brockhouse Institute for Materials Research
McMaster Universityaph@mcmaster.ca
Tel: (905) 525-9140 ext. 24749
Fax: (905) 521-2773Hamilton, Ont. L8S 4M1 CANADAFax: (905) 521-2773

<u>FOR BEGINNING USERS</u>, a number of <u>USEFUL DOCUMENTS</u> are available by download from <u>http://unicorn.mcmaster.ca/aXis2000.html</u>

TUTORIALS – SIMPLEdescribes unit operations for manipulating X-ray microscopy data.- ADVANCED- walks through a STXM data analysis using curve fitting

STACK_ANALYZE - manual to walk-through a typical stack analysis based on ALS STXM or PEEM data. [Warning – this document is quite dated and oriented to the analysis of PEEM data measured at ALS_PEEM2 (on the 7.1 bend magnet beamline]

STACK_FIT - manual to walk through stack fit from a prepared *.ncb aligned image sequence.

FOR PROGRAMMERS – SOME USEFUL ADD-INS (in aXis2000.zip)

Content.lst - lists all AXIS routines with a one-line description

Run **ax_make_html** at the IDL prompt. This will extract the header documentation from all the files to generate an html document with internal hyper-links etc. (there is an HTML file in the aXis2000 distribution with this output)

TEST-DATA – a set of files that can be used to test each of the aXis2000 routines (*contact Adam Hitchcock to obtain*)

GLOSSARY of terms associated with aXis2000

- *axis_XXX.ini* (XXX=win, unix, macOS) text file containing default parameters for aXis2000. Edit to adapt to your system
- *component maps* spatial distributions of a chemical species, which can be generated from multiple images (selected energies or a full image sequence) using *stacks~maps~SVD* or *stacks~maps~stack fit*)
- *dark count* signal (image or spectral) recorded without X-rays. This is detector specific (e.g. CCD camera leakage, light leakage into PMT etc) and must be subtracted from real signal before any data processing involving ratios (yield or absorption determinations).
- IDL Interactive Data Language is a high performance scientific computing platform, optimized for arbitrary sized multi-dimension array processing and image display. IDL was originally developed by David Stern and his team from Research Systems Inc. Wikipedia has a short history of IDL. The current owner is <u>L3Harris</u>
- *IDL Virtual Machine* a version of IDL which allows execution of compiled IDL script. This can be downloaded for free from <u>L3Harris</u>
- *IDL widget* a graphical user interface with pre-programmed data manipulation or other capabilities written in Interactive Data Language.
- *ini file* a text file which contains values of parameters used to customize aXis2000 for your environment
- *intensity profile* Plot of pixel value across a line defined on an image. Rectilinear profiles are available automatically, updated either on each mouse move, or after a right click, depending on the setting of the continuous lineouts control.
- *line scan spectra* a 2-d data set in which the intensity along a line is recorded at a series of photon energies. aXis2000 displays the data with energy along the horizontal axis and position along the line as the vertical axis. Thus horizontal lineouts (lower side panel) display spectra at a point; vertical lineouts (left side panel) display the contrast along the physical line at a given photon energy.
- *masked image* Output of *Images~generate_mask*. It is an image consisting of only 0 or 1 value pixeks, based on whether the original pixel was above (1) or below (0) a user-defined threshold. This, along with *Images~multiply buffers* and *Images~average pixels*, is useful to evaluate the intensity in a selected region of a component map.
- *netCDF* a standard binary scientific data format. The data is read and written by platform dependent routines provided by a standards body. Used for NSLS STXM data.
- *OD* optical density, or absorbance. In a transmission measurement (STXM, TXM) the recorded data is the intensity of the transmitted. X-rays. It is converted to OD by ln(I/Io) where I is the signal transmitted through the sample and Io is the signal without the sample in place.
- *self defining files* A structured, ascii format in which a syntax is used to allow a single program to read (and write) complex data structures without prior knowledge of the data structure. Read and write routines are available in C++ and IDL.
- *Stack* a set of images at a sequence of energies (in other spectromicroscopies, sometimes called a 'map')